

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re the Application of

Inventors: Guizeng SHI et al.

Application No.: 09/763,163

Filed: February 16, 2001

For: WIRELESS COMMUNICATION APPARATUS AND WIRELESS
COMMUNICATION METHOD



SUPPLEMENTAL DECLARATION OF OSAMU KATO UNDER 37 CFR '1.47(a)

Assistant Commissioner of Patents
Washington, D.C. 20231

RECEIVED

OCT 31 2001

Sir:

I, Osamu Kato, do hereby solemnly and sincerely declare that OFFICE OF PETITIONS

1. I have acted on behalf of Matsushita Electric Industrial Co., Ltd. in attempting to secure the signature of joint inventor Guizeng Shi on a Declaration Under 37 CFR ' 1.63 and Assignment associated with the above-identified application.

2. U.S. Application No. 09/763,163, the subject of this Declaration, which is the U.S. national stage filing of PCT international application number PCT/JP00/03874, claims priority from Japanese Appln. No. 11-178737 filed June 24, 1999, (see Exhibit A attached to the Declaration filed March 29, 2001).

3. Proof of the proprietary interest of Matsushita Electric Industrial Co., Ltd. in the present application is established by Exhibit C attached to the Declaration filed March 29, 2001.

4. On March 31, 2000, Guizeng Shi left the employ of Matsushita Electric Industrial Co., Ltd. His last known address is 4-4-18-104, Midori-cho, Akishima-shi, Tokyo 196-0004 JAPAN.
5. On February 16, 2001, I wrote to Guizeng Shi by registered mail and enclosed documents as listed in Exhibit D attached to the Declaration filed March 29, 2001, as well as a copy of the specification, claims abstract and drawings which had been forwarded to our U.S. attorney on February 13, 2001 and which were filed in the U.S. Patent Office on February 16, 2001.
6. My correspondence of February 16, 2001 to Mr. Shi was forwarded by registered mail return receipt (see Exhibits E and F attached to the Declaration filed March 29, 2001).
7. Exhibits E and F show that the mail was returned to sender after a one-week custodial period due to absence of the recipient.
8. On September 11, 2001, I telephoned Mr. Shi and found that his last known telephone number is no longer being used.
9. Around September 11, 2001, I attempted to reach Mr. Shi by e-mail, but I was unable to reach him.
10. Thereafter, I inquired with the Japanese Post Office as to whether Mr. Shi had left a ARequest for Forwarding@ and was informed that he had not.
11. On October 11, 2001, Ms. Tomoko Najima of Matsushita Electric Industrial Company, Ltd. wrote to Guizeng Shi by registered mail (see Exhibit AA which is Registered Mail Receipt and English translation) and enclosed the following documents (see Exhibit BB which is a Cover Letter and English translation):

1. Declaration for Patent Application for the above-captioned application, including the names of all three inventors of the present application and having attached to the Declaration the specification, claims, abstract and drawings as filed on November 28, 2000, for the above-captioned application;

ii. Assignment for the above-captioned application; and

iii. Cover letter requesting Mr. Shi to sign and date each of the documents as indicated, and return the originals to Matsushita Electric Industrial Co., Ltd.

12. Attached Exhibit CC is a ARecord of Delivery@ from the Akisima Post Office indicating that the mail identified in Section 11 above could not be delivered and that a forwarding address of the recipient is unknown.

13. Under the Japanese postal system, when the recipient is absent at the time of delivery of registered mail, a ANotice of Delivery@ is left in the recipient's mailbox. Attached Exhibit DD is a sample ANotice of Delivery@ used by the Japanese postal system, with English translation. This Notice tells the recipient that (1) he/she was absent when a mail from ASender@ was attempted to be delivered at a stated time of delivery on a given date, (2) the package will be kept in the [Name of location of Post Office] Post Office for him/her to pick up during a 7 day custodial period (extendible three days upon request of the recipient). There are two optional ways of receipt of the mail. One is ARequest of Re-delivery,@ and if the recipient wishes the Post Office to deliver again, he/she informs the Post Office of the convenient date by telephone or on the reverse side of the Notice of

Delivery. The other option is that the recipient goes to the appointed Post Office to pick up the mail.

14. To date, despite the diligent efforts of both the Assignee of this application, Matsushita Electric Industrial Co., Ltd., and the undersigned, we have been unable to locate or reach Mr. Guizeng Shi, in order to secure Mr. Shi's compliance with any of our above-identified requests to sign the Declaration Under 37 CFR ' 1.63 for the present application.

15. I further declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Respectfully submitted,

A handwritten signature in cursive script that reads "Osamu Kato". The signature is written in dark ink and is positioned above a horizontal line.

Osamu Kato

Date: October 19, 2001

AA

書留・配達記録郵便物受領証(お客様控)

(差出人の住所氏名)

松下通信工業株式会社様

受取人の氏名	引受番号	郵便料	申出損害要償額	摘要
石貴増	534-06 942875	¥600		配達記録

ご注意 この受領証は、損害賠償の請求をするときその他の場合に
必要ですから大切に保存してください。
簡易書留の損害賠償額は、8千円を限度とする実損額です。
摘要欄：カン(簡易)、キロ(配達記録)、ソク(速達)、ハイ(配達証明)
の記号 ナイ(内容証明)、トク(特別送達)、ダイ(代金引換)
ジ(引受時刻証明)、シテ(配達日指定)
配達状況がわかります。フリーダイヤル 0120-232886
インターネット <http://www.postalmpj.go.jp/>

H13.10.11
久里浜 郵便局
(印)

(English Annotation)

Registered Mail Receipt				
(sender's address and name) 5-3, Hikari no Oka, Yokosuka-shi Matsushita Communication Industrial Co., Ltd.				
recipient's name	Ref. No.	postal charge	proposed guarantee amount	memo
Guizeng SHI	534-06 94287-5	¥600		record of deliverly

October 11, 2001
Kurihama Post Office

RECEIVED
OCT 31 2001
OFFICE OF PETITIONS

2001. 10. 11

BB

E-mail: tomo@yvp.mci.mai.co.jp

宛先 (事業場名)	To 殿	発信 0468(40)5553 技術本部 技術管理課	責任者 村田	担当 名嶋
-----------	------	-------------------------------	-----------	----------

件名 サインのお願い ※修正・修正等変更があれば必ずご連絡下さい

米国出願第09/763,163号の
出願手続を行う関係上、添付の譲渡証・宣誓書にサインの上、
至丹 宛目()迄 名嶋 までご返送下さい。
なお、サインを行う場合は以下の点にご注意下さい。

1. 黒の万年筆又はボールペンをお使い下さい。
2. お名前をフルネームで、筆記体でお書き下さい。
3. 名前、名字の順番でサインして下さい
4. Post itのしてある (2) カ所にサインして下さい。 以上

同封書類
① 2001年2月16日出願の
米国特許第09/763,163号
の明細書(ルール、要約書、
図面を含む)
② サイレットフォーム

ご署名の際次の点にご留意下さい

1. 名・姓の順で。 山田 和 夫 → Kazuo Yamada

2. フルネームで。 イニシャルによる省略は認められません。

不適切な例 . . . K. Yamada

3. 筆記体で。 活字体は個人の特徴があらわれにくく、認められません。

不適切な例 . . . KAZUO YAMADA

4. 複数回サインする場合はいつも同じサインで。

5. タイプされた綴りと同一の綴りで。

不適切な例 . . . Tatsuo Okawa
Tatsuo Okawa

なお、常時使用されている綴りがこれと異なる場合は、常時使用されている綴りでサインしていただき、その旨ご連絡下さい。

6. 修正液で修正しないで下さい。訂正の必要な場合は二重線で消して、その横又は上下に再度ご署名下さい。

7. 署名者ご本人の既署名コピーが添付されている場合は、そのコピーと同様に願います。

(注) とくに米国出願は発明者自身が出願人となりますので、発明者のサインは権利の帰属関係を明らかにする極めて重要なものとなります。不適切なサインは各国の特許庁に受理されないことがあります。

(English Annotation)

October 11, 2001

To: Mr. Guizeng SHI

From: Tomoko Najima
Matsushita Communication Industrial Co., Ltd.

TEL 0468 (40) 5553

REQUEST FOR SIGNATURE

Please sign the attached Declaration (which has attached thereto the specification, claims, abstract and drawings as filed on February 16, 2001 in the U. S. Patent Office in Appln. No. 09/763,163) and Assignment for filing in said U.S. Patent Application No. 09/763,163 and return the same to us as soon as possible.

- * If there are any changes of your address or telephone number etc., please let us know.
- * We would ask you to return the executed forms without fail.

1. Please sign by black pen or ballpoint pen.
2. Please write your full name by regular handwriting.
3. Please sign in family name first style.
4. Please sign two places marked with post-it.

ATTENTION FOR SIGNATURE

RECEIVED
OCT 31 2001
OFFICE OF PETITIONS

1. Please sign in family name first style.

YAMADA Kazuo → Kazuo Yamada

2. First and Last name must be included in full. Abbreviated initial is not accepted.

Inappropriate Example..... K. Yamada

3. Please sign by regular handwriting. Block letters are not accepted as an individual feature is hardly shown therein.

Inappropriate Example KAZUO YAMADA (in block letters)

4. In case of signing multiple times, the same signature is required every time.
5. Signed spelling must be the same as typed spelling.

Inappropriate Example Tatuo Ohkawa
Tatsuo Ookawa

If the typed spelling is different from your regular use spelling, please sign by your regular use spelling and let us know the difference.

6. Please do not make a correction by cover-up liquid. If any correction is required, please draw a double line on letters to be corrected. Then, please sign again sideways, above or below the letters.
7. When a copy of any document, which the undersigned has executed in past, is attached hereto, please sign the name as well as the attached copy.

[Remarks]

Especially, as an inventor himself is the applicant for U. S. Application, the signature of inventor is extremely important to clarify an assignment relation. Inappropriate signature sometimes cannot be accepted by the Patent Office of each country.

USA
ASSIGNMENT OF PATENT APPLICATION

- (1) Guizeng SHI
(2) Osamu KATO
(3) Mitsuru UESUGI
(4) _____
(5) _____

In consideration of the sum of one dollar (\$1.00) and other good and valuable consideration paid to each of the undersigned, the undersigned agree(s) to assign, and hereby does assign, transfer and set over to

- (6) MATSUSHITA ELECTRIC INDUSTRIAL CO., LTD.
(6a) of 1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8501 JAPAN
(7) _____
(7a) of _____

RECEIVED
OCT 31 2001

(hereinafter designated as the Assignee) the entire rights, title and interest for the United States, its territories, dependencies and possessions, and for the country of

OFFICE OF PETITIONS

- (8) _____ in the invention, and all applications for patent and any Letters Patent which may be granted therefor, known as

- (9) WIRELESS COMMUNICATION APPARATUS AND
WIRELESS COMMUNICATION METHOD (Case No. _____)

for which the undersigned has (have) executed on even date herewith an application for patent in the United States of America or, if not on even date, then has executed

- (10) on _____ or has already filed
(11) U.S. appln. Serial No. 09/763,163, filed on February 16, 2001

- (12) The undersigned acknowledges an obligation of assignment of this invention to said assignee at the time the invention was made.

1) The undersigned agree(s) to execute all papers necessary in connection with the application and any continuing or divisional applications thereof and also to execute separate assignments in connection with such applications as the Assignee may deem necessary or expedient.

2) The undersigned agree(s) to execute all papers necessary in connection with any interference which may be declared concerning this application or continuation or division thereof and to cooperate with the Assignee in every way possible in obtaining such evidence and going forward with such interference.

3) The undersigned agree(s) to execute all papers and documents and perform any act which may be necessary in connection with claims or provisions of the International Convention for Protection of Industrial Property or similar agreements.

4) The undersigned agree(s) to perform all affirmative acts which may be necessary to obtain a grant of a valid United States patent to the Assignee.

5) The undersigned hereby authorize(s) and request(s) the Commissioner of Patents to issue any and all Letters Patent of the United States resulting from said application or any division or divisions or continuing applications thereof to the said Assignee, as Assignee of the entire interest, and hereby covenants that he has (they have) full right to convey the entire interest herein assigned, and that he has (they have) not executed and will not execute, any agreement in conflict herewith.

6) The undersigned hereby grant(s) the firm of STEVENS, DAVIS, MILLER & MOSHER, L.L.P. the power to insert on this assignment any further identification which may be necessary or desirable to comply with the rules of the United States Patent Office for recordation of this document.

In witness whereof, executed by the undersigned on the date(s) opposite the undersigned signature(s).

Date _____ Signature of Inventor (1) _____ (Seal)

Date _____ Signature of Inventor (2) _____ (Seal)

Date _____ Signature of Inventor (3) _____ (Seal)

Date _____ Signature of Inventor (4) _____ (Seal)

Date _____ Signature of Inventor (5) _____ (Seal)

This assignment should preferably be signed before: (a) a Notary Public if within the U.S.A., or (b) a U.S. Counsel if outside the U.S.A. If neither, then it should be signed before at least two witnesses who also sign here:

Date _____ Signature of Witness _____ (Seal)

Date _____ Signature of Witness _____ (Seal)

**APPLICATION FOR UNITED STATES PATENT
Declaration for Patent Application**

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on

the invention entitled: WIRELESS COMMUNICATION APPARATUS AND WIRELESS COMMUNICATION METHOD

the specification of which

2 (file no _____)

(check at least one)

3 ☐ is attached hereto

4 ☒ was filed on February 16, 2001 as (5) U.S. Application Serial No. 09/763,163

6 ☐ and was amended _____

(if applicable)

Use this portion only if you are entering the U.S. National phase based on a PCT International Application designating the U.S.	7 <input checked="" type="checkbox"/>	was filed as PCT international application		
	8	Number <u>PCT/JP00/03874</u>		
	9	on <u>June 15, 2000</u>		
	10	and was amended under PCT Article(s) 19 and/or 34 on _____ (if applicable).		
	11	priority date claimed in PCT International Application		
		<u>JAPAN</u> (Country)	<u>JP11-178737</u> (Number)	<u>24/June/1999</u> (Day/Month/Year Filed)
		(Country)	(Number)	(Day/Month/Year Filed)
		(Country)	(Number)	(Day/Month/Year Filed)

RECEIVED

OCT 31 2001

OFFICE OF PETITIONS

I hereby declare that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended, by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me which is material to patentability in accordance with Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application (s) for patent or inventor's certificate listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date earlier than that of the application(s) on which priority is claimed.

	Prior (Foreign) Application(s) any Priority Claims Under 35 U.S.C. 119			Priority Claimed	
12a	<u>JAPAN</u> (Country)	<u>JP10-356409</u> (Number)	<u>15/December/1998</u> (Day/Month/Year Filed)	<input type="checkbox"/> Yes	<input checked="" type="checkbox"/> No
	(Country)	(Number)	(Day/Month/Year Filed)	<input type="checkbox"/> Yes	<input type="checkbox"/> No

Priority Claim(s) from U.S. Provisional Application(s) – I hereby claim the benefit under Title 35, United States Code, §119(e) of any United States provisional application(s) listed below:

12b	Application No. _____	Day/Month/Year Filed _____	Application No. _____	Day/Month/Year Filed _____
-----	-----------------------	----------------------------	-----------------------	----------------------------

Do not use this portion to identify a PCT application if the parent application is the U.S. National phase of the PCT application

I hereby claim the benefit under Title 35, United States Code, 120 of any United States application(s) or PCT international application(s) designating the United States of America that is/are listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in that/those prior application(s) in the manner provided by the first paragraph of Title 35, United States Code §112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, §1.56 which became available between filing date of the prior application and the national or PCT international filing date of this application.

13	_____	_____	_____
	(U.S. Application Number)	(U.S. Filing Date)	Status (patented, pending, abandoned)

I hereby appoint the following attorneys of the firm of Stevens, Davis, Miller & Mosher, L.L.P. as my attorneys of record with full power of substitution and revocation to prosecute this application and to transact all business in the Patent and Trademark Office:

James E. Ledbetter, Reg. No. 28732; Thomas P. Pavelko, Reg. No. 31689; and Anthony P. Venturino, Reg. No. 31674.

**ALL CORRESPONDENCE IN CONNECTION WITH THIS APPLICATION SHOULD BE SENT TO
STEVENS, DAVIS, MILLER & MOSHER, L.L.P., 1615 L Street, N.W., Suite 850, Washington, D.C. 20036,
TELEPHONE (202) 408-5100, FACSIMILE (202) 408-5200.**

See page 2 for signature lines

INSTRUCTIONS FOR COMPLETION OF THIS FORM

- line 1 Insert the same title as is used in the specification and in the assignment.
- line 2 Is optional but is provided so that you can use it to identify more readily an application prior to the time that the Patent Office application serial number is assigned. We suggest that the specification, drawings and declaration always bear a file number since it can help to get the papers together in case they become inadvertently separated. In instances where the specification is filed without a signed declaration form (under 37 CFR §1.53) a file number on a later-received separate form will assist us in associating it with the correct case.
- line 3 Check this box if the specification, claims and drawing (if any) are attached to this declaration form, e.g., when filing a new patent application.
- lines 4-5 Are only used in an instance where the application is already on file and the declaration from is being separately filed, e.g., when the application was originally filed without a signed declaration or where the Patent Office has required a new declaration because of a deficiency in the original declaration. In such an instance the Patent Office will require that lines 4 and 5 be completed with the filing date and application serial number already assigned.
- line 6 Is used in conjunction with line 5 but only when there have been one or more amendments to the specification or claims. Line 6 is also used when the Examiner requires a new declaration because claims inserted by amendment cover subject matter not originally claimed (37 CFR §1.67).
- lines 7-11 Are for PCT (Patent Cooperation Treaty) cases and are used only when you are entering the U.S. National phase (Chapter I or II) based upon a previously filed PCT International application designating the U.S.
- line 7 Check this box if this is a PCT National Phase application.
- line 8 Insert PCT International application number.
- line 9 Insert date of filing of PCT International application.
- lines 10-11 Insert the date of all amendments filed in the PCT International application. Such amendments are optional, so this line at times will not be used.
- line 12a Is used in the following instances:
- (i) If a single priority is being claimed from a foreign application you need to list only the first-filed application; you do not need to list other countries if all applications were filed within one year of the U.S. filing.
 - (ii) If multiple priorities are being claimed, from a plurality of applications filed in one or more countries, you must list the first filed application for each aspect of the invention. Example: if aspect A of the invention was disclosed in an application filed 11 months earlier in country X and aspect B was disclosed 9 months earlier in an application filed in country Y, then the applications in both countries X and Y must be identified. Only the first application for each aspect of the invention needs to be identified provided all applications on that aspect were filed within one year prior to the U.S. filing.
 - (iii) If a non-priority application is being filed you must list all applications in all countries where corresponding foreign applications were filed more than one year prior to the U.S. filing. This is so the Examiner can check to see if any of those applications were published or patented early enough to be prior art against the U.S. application.
 - (iv) If there are more than two applications to be listed we suggest that you type in on this form only "See attached Schedule A" and then list all of the previous applications on an attached sheet.
- line 12b Is used to claim priority under 35 USC §119(e) based on a provisional application filed within one year of the filing of the instant application. More than one provisional application may be identified provided neither was filed more than one year earlier.
- line 13 This block is used only in instances where there is a previously filed U.S. non-provisional application which was copending at the time the present application was (or is being) filed. That previous application could be a U.S. non-provisional application or the National Phase of a PCT allocation. In such a case the present application may be entitled to the priority of the previous application's U.S. filing date (and consequently the foreign priority thereof) provided the present application is identified as a continuing application (continuation, divisional or continuation-in-part) of the earlier (parent) application. If the foregoing is applicable, please fill in one line for each such prior application.
- line 14 Type the inventor's proper legal name in the order specified, e.g., "John B. JONES" or "J. Bob JONES" if the inventor so prefers. It is not acceptable to use only initials such as "J. B. JONES."
- line 15 The inventor's "signature" may be his (or her) usual manner of signing but it is preferable that the inventor simply write his (or her) name in his (or her) own cursive handwriting in the same order as on line 14, e.g., given name, middle initial and Family name.
- line 16 Insert the actual date of signature.
- line 17 Insert simply the city and state or country, e.g., "Paris, France", of the inventor's residence, not citizenship. No street address or postal code is required on this line.
- line 18 Insert the inventor's citizenship. The statement of citizenship (or subject of) is a statutory requirement (35 USC §115). Simply the name of the country of citizenship, e.g., "Japan" is sufficient.
- line 19 Insert the inventor's mailing address. The purpose of requiring the post office address is to enable the Patent Office to communicate directly with the inventor if desired, such as in the case of death of the U.S. attorney. It should be the address where the inventor customarily receives his (or her) mail and should include the postal code. If applicable it can be the inventor's business address or address at place of employment.

Applicants are reminded that the U.S. Patent and Trademark Office has very strict requirements as to proper execution of an application. The applicant should make sure that he reviews the declaration, prior to signing to make sure the declaration properly identifies the application and all relevant information; and should review the specification and claims (including drawings, if any) before signing the declaration. Failure to do so will require the filing of a supplemental declaration --- 37 CFR §1.67(c).

Any handwritten changes to the specification, claims or drawings must be in ink personally by all of the inventors prior to signing the declaration and the adjacent left margin must be initialed and dated by all of the inventors, e.g., "JBJ 6-9-91".

Please let us know if there are any questions regarding proper completion of this form. Thank you.

An assignment, a separate document requiring separate signature and dating may be enclosed. Please look for it and sign and date it in the same manner as in lines 15 and 16 above.

STEVENS, DAVIS, MILLER & MOSHER, L.L.P.

I hereby declare that all statements made herein are true to my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful statements may jeopardize the validity of the application or any patent issuing thereon.

PAGE 2 OF U.S.A. DECLARATION FORM

14a	Typewritten Full Name of Sole or First Inventor	Guizeng	SHI	
		Given Name	Middle Name	Family Name
15a	Inventor's Signature			
16a	Date of Signature	Month	Day	Year
17a	Residence	Akishima-shi	Tokyo	JAPAN
		City	State or Province	Country
18a	Citizenship	JAPAN		
19a	Post Office Address (Insert complete mailing address, including country)	4-4-18-104, Midori-cho,		
		Akishima-shi, Tokyo 196-0004 JAPAN		
14b	Typewritten Full Name of Sole or First Inventor	Osamu	KATO	
		Given Name	Middle Name	Family Name
15b	Inventor's Signature			
16b	Date of Signature	Month	Day	Year
17b	Residence	Yokosuka-shi	Kanagawa	JAPAN
		City	State or Province	Country
18b	Citizenship	JAPAN		
19b	Post Office Address (Insert complete mailing address, including country)	5-45-G302, Shonantakatori,		
		Yokosuka-shi, Kanagawa 237-0066 JAPAN		
14c	Typewritten Full Name of Sole or First Inventor	Mitsuru	UESUGI	
		Given Name	Middle Name	Family Name
15c	Inventor's Signature			
16c	Date of Signature	Month	Day	Year
17c	Residence	Yokosuka-shi	Kanagawa	JAPAN
		City	State or Province	Country
18c	Citizenship	JAPAN		
19c	Post Office Address (Insert complete mailing address, including country)	17-1-402, Anjindai,		
		Yokosuka-shi, Kanagawa 238-0048 JAPAN		
14d	Typewritten Full Name of Sole or First Inventor			
		Given Name	Middle Name	Family Name
15d	Inventor's Signature			
16d	Date of Signature	Month	Day	Year
17d	Residence			
		City	State or Province	Country
18d	Citizenship			
19d	Post Office Address (Insert complete mailing address, including country)			

*Note to Inventor: Please sign name on line 15 exactly as it appears in line 14 and insert the actual date of signing on line 16. If there are more than four inventors, please add a copy of this page for identification and signatures for the additional inventors.

DESCRIPTION

WIRELESS COMMUNICATION APPARATUS AND WIRELESS
COMMUNICATION METHOD

5 Technical Field

The present invention relates to a wireless communication apparatus using ATM (Asynchronous Transfer Mode).

10 Background Art

As conventional wireless communication systems using ATM, there are major two samples as described below.

A first conventional system is an AWA (ATM Wireless
15 Access) system with a purpose of providing multimedia services to mobile users. FIG.1 is a schematic diagram illustrating a structure of a frame for use in a conventional wireless communication system.

As illustrated in FIG.1, the structure of one frame
20 has a first part in which access channel (Ach) 11 is followed by control channel (Cch) 12 and then user channel (Uch) 13, and a latter part in which access channel (Ach) 14 is followed by control channel (Cch) 15 and then user channel (Uch) 16.

25 Each of access channels 11 and 14 contains two time slots, namely, a downlink time slot (A_d) and an uplink time slot (A_u). Downlink Ach is a channel used in

instructing a mobile station on Cch allocation as well as a broadcast channel for various control information. Uplink Ach is a random access channel to acquire Cch.

Control channel (Cch) 12 is an uplink control channel and control channel (Cch) 15 is a downlink control channel. Cch is used in transmitting and receiving Uch control information such as establishment, disconnection and switching of Uch and messages concerning Cch switching control.

10 User channels (Uch) 13 and 16 contain downlink time slots for a base station to transmit for example ATM cells to a mobile station, and uplink time slots for the mobile station to transmit for example ATM cells to the base station.

15 In the conventional communication system using the aforementioned frame, a base station controls all the time slots of the control channels (Cch) and user channels (Uch). As a method for setting a communication band for a user request, the base station allots time
20 slots for use by each mobile station from among time slots of user channels (Uch) 13 and 16 corresponding to the user request.

Further in an asymmetric traffic on up-and downlink channel, a base station designates the number of Uch time
25 slots for the uplink and that for the downlink corresponding to a user information transmission rate independently using a wireless channel control section

at the time of channel allocation, instead of designating the same number of Uch time slots for the uplink and downlink, and thereby performs setting of communication band for user request.

5 A mobile station establishes synchronization of Ach with a base station providing a highest received level immediately after being turned on, and then transmits a message for requesting Cch establishment using uplink Ach by random access. The base station that
10 receives the request searches unused Cch, transmits a Cch allocation message, and thereby notifies the mobile station of a Cch time slot number to use. Each base station is allocated one uplink Cch and one downlink Cch. Using these Cchs, each base station always transmits
15 control information. Based on call control information, the base station notifies the mobile station of Uch time slots corresponding to a communication rate requested by a user using a Uch allocation instructing message. The base station manages a relationship between a Uch
20 time slot number and Cch or mobile station number, and further manages used channels on Cch and Uch for each mobile station.

A second example of the conventional systems is an ATM-LAN system using radio signals with a wavelength of
25 the order of millimeters. This system uses an uplink channel based on a random access scheme at a reservation stage and on a polling scheme at an information

transmission stage succeeding the reservation stage.

The polling in the above system includes periodical polling (such polling that periodically transmits a polling signal to each user) and non-periodical polling
5 (such polling that irregularly transmits a polling signal to each user). These kinds of polling are used corresponding to QoS (Quality of Service) of user information.

A base station sets information such as a polling
10 period, priority and polling time in a polling scheduler. Further based on the periodical polling, the base station calculates the polling time of each user to update the contents of the polling scheduler. After that, based on the updated polling scheduler, the base station
15 transmits the polling signal to each user. According to the polling signal transmitted from the base station as described above, each user transmits a transmission queuing data frame.

In addition, the base station performs the non-
20 periodical polling between the periodical polling.

However, there are following problems in the convention systems.

The first system has a frame structure disorderly containing an uplink time slot and downlink time slot
25 on Uch, although a guard time with a long time interval is needed between the uplink time slot and downlink time slot for immunity to interference. Accordingly in the

first conventional system, it is necessary to provide a large number of guard time intervals as a whole, and therefore there are problems that the frame utilization rate deteriorates and that the system capacity decreases.

Further in the first conventional system, the channel allocation is not performed based on traffic amounts of the uplink and downlink. Therefore, in an asymmetric traffic on which traffic amounts (transmission rates) are different between the uplink and downlink channels, the frame utilization rate is low on a channel with a low transmission rate as compared to the other channel with a high transmission rate. Accordingly, there is another problem that the first conventional system is not capable of improving the system capacity.

Furthermore in the first conventional system, packets do not collide with each other, however, Uch is occupied for each connection. Therefore the efficiency based on the packet exchange deteriorates and comes close to that based on channel exchange. In currently used packet access control schemes (such as random access scheme and reservation scheme), the efficiency is improved to some extent, however, the problem on the collision is not improved, therefore the throughput deteriorates, and delay and delay variation are increased.

In the second conventional system, communications corresponding to QoS of user are achieved, however, an asymmetric traffic is not considered, and therefore there are problems that the frame utilization rate and system capacity cannot be improved.

Disclosure of Invention

It is an object of the present invention to provide a wireless communication apparatus that faithfully responds to an asymmetric traffic and QoS of user and enables improved frame utilization rate and improved system capacity. This object is achieved by allocating time slots for use by each communication user based on respective situations of transmission queuing cell on uplink channel and downlink channel of the communication user.

Brief Description of Drawings

FIG.1 is a schematic diagram illustrating a structure of a frame used in a conventional wireless communication system;

FIG.2 is a schematic diagram illustrating a structure of a communication system using a wireless communication apparatus according to a first embodiment of the present invention;

FIG.3 is a schematic diagram illustrating a frame format used in the wireless communication apparatus

according to the first embodiment;

FIG.4 is a schematic diagram illustrating a structure of a time slot on a user channel of the frame format used in the wireless communication apparatus
5 according to the first embodiment;

FIG.5 is a block diagram illustrating a configuration of a base station provided with the wireless communication apparatus according to the first embodiment;

10 FIG.6 is a block diagram illustrating a configuration of a wireless channel control section in the wireless communication apparatus according to the first embodiment;

FIG.7 is a block diagram illustrating a
15 configuration of a user channel managing section in the wireless communication apparatus according to the first embodiment;

FIG.8A is a schematic diagram illustrating a channel allocation method for use by a channel allocating
20 section in the wireless communication apparatus according to the first embodiment;

FIG.8B is a schematic diagram illustrating a channel allocation result by the channel allocating section in the wireless communication apparatus
25 according to the first embodiment;

FIG.9A is a schematic diagram illustrating a channel allocation method for use by a channel allocating

section in the wireless communication apparatus according to a second embodiment of the present invention;

FIG.9B is a schematic diagram illustrating a
5 channel allocation result by the channel allocating section in the wireless communication apparatus according to the second embodiment;

FIG.10A is a schematic diagram illustrating a
channel allocation method for use by a channel allocating
10 section in the wireless communication apparatus according to a third embodiment of the present invention;

FIG.10B is a schematic diagram illustrating a
channel allocation result by the channel allocating
section in the wireless communication apparatus
15 according to the third embodiment;

FIG.11 is a schematic diagram illustrating an example of a frame structure according to a fourth embodiment of the present invention; and

FIG.12 is a schematic diagram illustrating an
20 example of a frame structure according to a fifth embodiment of the present invention.

Best Mode for Carrying Out the Invention

Preferred embodiments for carrying out the present
25 invention are explained specifically below with reference to accompanying drawings. In addition, a wireless communication apparatus according to the

present invention performs communications using ATM.
(First embodiment)

FIG.2 is a schematic diagram illustrating a structure of a communication system using the wireless communication apparatus according to the first embodiment of the present invention. Base station (BTS) 101 communicates with mobile station (MS) 102, for example, using a TDMA (Time Division Multiple Access)/TDD (Time Division Duplex) system.

FIG.3 is a schematic diagram illustrating a frame format used in the wireless communication apparatus according to the first embodiment. As illustrated in FIG.3, a unit frame (1 frame) is comprised of access channel (Ach) 201, uplink control channel (Cch) 202, downlink control channel (Cch) 203, downlink user channel (Uch) 204, and uplink user channel (Uch) 206.

Access channel 201 is comprised of downlink time slot (A_d) and uplink time slot (A_u). The downlink time slot is used for base station 101 to broadcast various control information to each mobile station 102 as well as instructing a control channel allocated to each mobile station 102. Meanwhile, the uplink time slot is used for each mobile station 102 to acquire the control channel.

Uplink control channel 202 and downlink control channel 203 are used for base station 101 and each mobile station 102 to communicate control information on

establishment, disconnection and switching of each user channel and information on switching control of each control channel.

In particular, uplink control channel 202 is a
5 channel used for each mobile station 102 to transmit to base station 101 a reporting signal for reporting contents of a transmission buffer of each mobile station 102 for each frame. The reporting signal is indicative of presence or absence of transmission data (such as an
10 ATM cell) in the transmission buffer of each mobile station 102, queuing situation of cells to be transmitted (the number of queuing cells or level representative of the number of queuing cells), and particular QoS requirement. Base station 101 thereby recognizes a
15 situation on transmission of each mobile station 102.

Meanwhile, downlink control channel 203 is a channel used for base station 101 to notify a position of a user channel allocated to each mobile station 102 according to a user channel allocation result described
20 later.

Downlink user channel 204 is a channel used for base station 101 to transmit, for example, ATM cells to each mobile station 102. Uplink user channel 206 is a channel for each mobile station 102 to transmit, for example,
25 the ATM cells to base station 101. The respective numbers of time slots contained on downlink user channel 204 and on uplink user channel 206 are not fixed, and

boundary position 205 between the channels is determined based on the user channel allocation result described later.

FIG.4 illustrates an example of a structure of each time slot on the aforementioned user channel. FIG.4 is a schematic diagram illustrating the structure of the time slot on the user channel with the frame format used in the wireless communication apparatus according to this embodiment. Each time slot is comprised of protection guard time (GT) 301, bit timing recovery code (BTR) 302, unique word (UW) 303, and eight cells 304. In addition, the aforementioned structure of the time slot on the user channel is one of examples and is capable of being modified as appropriate corresponding to, for example, a communication situation and use.

An internal configuration of base station 101 illustrated in FIG.2 is next explained using FIG.5. FIG.5 is a block diagram illustrating a configuration of a base station provided with the wireless communication apparatus according to this embodiment.

First, at the time of reception, antenna section 401 receives a signal transmitted from each mobile station 102 to output to RF section 402. RF section 402 performs frequency conversion on the signal transmitted from antenna section 401, and outputs the signal with the converted frequency to modulation/demodulation section 403. Modulation/demodulation section 403

performs demodulation such as $\pi/4$ QPSK scheme on the signal output from RF section 402, and outputs the demodulated signal to TDMA section 404.

5 TDMA section 404 performs general TDMA processing on the signal output from modulation/demodulation section 403. That is, TDMA section 404 first fetches data corresponding to a time slot at a predetermined timing from the signal output from modulation/demodulation section 403, and extracts a
10 unique word from the fetched data to establish synchronization.

After establishing the synchronization, TDMA section 404 fetches various information from the data corresponding to a time slot, and corresponding to the
15 contents of the fetched information, outputs the information to IF section 405 or wireless channel control section 406. Specifically, when the thus fetched information is various control information described previously transmitted on access channel 201 and control
20 channel 202, TDMA section 404 outputs the fetched information to wireless channel control section 406. Meanwhile, when the thus fetched information is, for example, speech information transmitted on user channel 206, TDMA section 404 outputs the fetched information
25 to IF section 405.

IF section 405 outputs the information output from TDMA section 404 to PSTN (Public Switched Telephone

Network) and ISDN (Integrated Services Digital Network).

Next, at the time of transmission, IF section 405 outputs a signal transmitted from PSTN and ISDN to TDMA section 404.

5 According to the frame format contents (FIG.3) described previously, TDMA section 404 performs general TDMA processing on the signal containing various control information output from wireless channel control section 406 or the signal output from IF section 405. That is,
10 according to the frame format contents, TDMA section 404 adds a control signal such as a unique word to the signal containing various control information output from wireless channel control section 406 or the signal output from IF section 405 to generate data corresponding to
15 a time slot, and inserts the generated data corresponding to a time slot into a predetermined slot at a predetermined timing to output to modulation/demodulation section 403.

Modulation/demodulation section 403 performs
20 modulation such as $\pi/4$ QPSK scheme on the signal output from TDMA section 404, and outputs the modulated signal to RF section 402. RF section 402 performs frequency conversion on the signal output from modulation/demodulation section 403, and transmits the
25 signal with the converted frequency to each mobile station 102 through antenna section 401.

Call control section 407 performs user management

such as call connection control and authentication of a user (mobile station).

Wireless channel control section 406 controls above-mentioned antenna section 401, RF section 402, 5 modulation/demodulation section 403, TDMA section 404, IF section 405, and call control section 407. An internal configuration of wireless channel control section 406 is explained using FIG.6.

FIG.6 is a block diagram illustrating the internal 10 configuration of wireless channel control section 406 provided in base station 101 equipped with the wireless communication apparatus according to this embodiment. Wireless channel control section 406 is mainly provided with communication quality monitoring section 501, 15 mobile station managing section 502, and wireless resource managing section 503.

Communication quality monitoring section 501 always monitors a communication quality of each channel, and performs processing such as switching or 20 disconnection of a channel on which the communication quality deteriorates. Mobile station managing section 502 manages a telephone number of each mobile station 102, while managing a channel for use by mobile station.

Wireless resource managing section 503 manages, 25 for example, allocation of wireless resource. That is, wireless resource managing section 503 performs channel allocation to each mobile station 102 using various

control information output from TDMA section 404, while outputting a channel allocation result to TDMA section 404. More specifically, wireless resource managing section 503 is comprised of access channel (Ach) managing section 504, control channel (Cch) managing section 505, and user channel (Uch) managing section 506.

Access channel managing section 504 manages access channel 201. In particular, when access channel managing section 504 receives through TDMA section 404 a signal for requesting acquisition of a control channel transmitted from each mobile station 102, the section 504 requests control channel managing section 505 to allocate a control channel to each mobile station 102. Then, access channel managing section 504 receives the control channel allocation result for each mobile station 102 from control channel managing section 505, and transmits the result to each mobile station 102 through TDMA section 404.

Control channel managing section 505 manages uplink control channel 202 and downlink control channel 203. That is, when control channel managing section 505 receives a request for allocating a control channel to each mobile station 102 from access channel managing section 504, the section 503 determines a time slot to allocate to each mobile station 102 from among time slots on each control channel. After that, control channel managing section 505 outputs the allocation result

described above to access channel managing section 504.

Further when control channel managing section 505 receives the reporting signal for reporting the contents of the transmission buffer transmitted for each frame from each mobile station 102 through TDMA section 404, the section 505 outputs a signal for requesting time slot allocation on each user channel to user channel managing section 506 along with the reporting signal. Then, when control channel managing section 505 receives the allocation result from user channel managing section 506, the section 505 transmits the allocation result to each mobile station 102 through TDMA section 404.

User channel managing section 506 manages uplink user channel 206 and downlink user channel 204. Specifically, user channel managing section 506 allocates time slots for use by each mobile station 102 on uplink user channel 206 and on downlink user channel 204. More specifically, user channel managing section 506 allocates time slots for use by each mobile station 102 based on a situation (hereinafter referred to as uplink transmission situation) of the number of transmission queuing cells that each mobile station 102 has, another situation (hereinafter referred to as downlink transmission situation) of the number of transmission queuing cells that base station 101 has, and the other situation indicating how many transmission queuing cells that require particular QoS are contained

in respective transmission queuing cells that each mobile station 102 and base station 101 have.

Among those situations, since user channel managing section 506 manages each user channel, the
5 section 506 can always recognize the downlink transmission situation and the situation (hereinafter referred to as QoS requirement situation of the base station) of the transmission queuing cells that require the particular QoS contained in the transmission queuing
10 cells that base station 101 has.

Meanwhile, since using the reporting signal described previously on uplink control channel 202, each mobile station transmits to base station 101 the uplink transmission situation and the situation (hereinafter
15 referred to as QoS requirement situation of the mobile station) of the transmission queuing cells that require the particular QoS contained in the transmission queuing cells that mobile station 102 has, user channel managing section 506 can recognize the above situations.

20 A specific configuration of user channel managing section 506 is explained below using FIG.7. FIG.7 is a block diagram illustrating a configuration of user channel managing section 506 provided inside base station 101 equipped with the wireless communication
25 apparatus according to this embodiment.

User channel managing section 506 is mainly comprised of downlink transmission situation buffer 601,

channel allocating section 602 and downlink transmission situation buffer 603.

Downlink transmission situation buffer 601 stores information on the downlink transmission situation and
5 on the QoS requirement situation of the base station, while outputting the aforementioned information to channel allocating section 602.

Uplink transmission situation buffer 603 stores information on the uplink transmission situation and on
10 the QoS requirement situation of the mobile station, while outputting the aforementioned information to channel allocating section 602. The uplink transmission situation and the QoS requirement situation of the mobile station are of information transmitted from
15 each mobile station 102 to base station 101 using uplink control channel 202 as described above, and output to uplink transmission buffer 603 through control channel managing section 505.

Channel allocating section 602 receives the
20 information on the downlink transmission situation and on the QoS requirement situation of the base station from downlink transmission situation buffer 601 and further receives the information on the uplink transmission situation and on the QoS requirement situation of the
25 mobile station from uplink transmission situation buffer 603. Based on the received information, channel allocating section 602 performs channel allocation on

downlink user channel 204 and uplink user channel 206. A specific channel allocation method for use by channel allocating section 602 is explained below using FIG.8A.

FIG.8A is a schematic diagram illustrating a channel allocation method for use by channel allocating section 602 provided in base station 101 equipped with the wireless communication apparatus according to this embodiment.

As a channel allocation method, channel allocating section 602 adopts a scheme for achieving that channels are allocated fairly corresponding to both transmission situations, namely, the uplink transmission situation and downlink transmission situation without distinguishing between the uplink and downlink and that channels are allocated in consideration of the QoS requirements of the mobile station and of the base station. The scheme is explained using FIG.8A.

In FIG.8A, an upper portion indicates the downlink transmission situation and the QoS requirement situation of the mobile station stored in downlink transmission situation buffer 601, and a lower portion indicates the uplink transmission situation and the QoS requirement situation of the base station stored in uplink transmission situation buffer 603. That is, the upper portion indicates the buffer contents indicative of situations of transmission queuing cells to transmit to users (mobile stations) 1 to m that base station 101 has,

respectively using $\lambda_{D,1}$ to $\lambda_{D,m}$. The lower portion indicates the buffer contents indicative of situations of transmission queuing cells to transmit to base station 101 that users 1 to m have, respectively using $\lambda_{U,1}$ to $\lambda_{U,m}$. For example, it is indicated that buffer $\lambda_{D,1}$ contains three transmission queuing cells to transmit to user 1 from base station 101 and that buffer $\lambda_{U,m}$ contains no transmission queuing cell to transmit to base station 101 from user m.

Further, a middle portion indicates dual shift ring 701 that conceptually indicates the channel allocation method. Dual shift ring 701 is mainly comprised of a ring (hereinafter referred to as normal ring) for fairly allocating channels to each user and another ring (hereinafter referred to as high-rate ring) for preferentially allocating channels to a particular user requiring a real-time and high-rate communication such as an image communication. The two rings are alternatively circulated. In addition, in FIG.8A, the normal ring is a ring lying on an outer side, and the high-rate ring is a ring lying on an inner side from the normal ring.

Channel allocating section 602 performs channel allocation according to a certain rule as described below. Channel allocating section 602 first determines (loop check) whether or not each user is a user for the allocation in the order along dual shift ring 701. The

user for the allocation at the time of the normal ring is every user having a transmission queuing cell, and such a user at the time of the high-rate ring is only a particular user having a transmission queuing cell.

5 Further, channel allocating section 602 allocates a unit sub-slot, i.e., a single sub-slot (corresponding to a cell) to a user for the allocation, and decreases the number of transmission queuing cells in the buffer for this user by 1. Thereafter, channel allocating
10 section 602 allocates a sub-slot to each user up to the maximum number of accommodated channels, i.e., the maximum number of sub-slots that a frame is capable of accommodating, while checking along dual shift ring 701.

 The aforementioned channel allocation is performed
15 for each frame. In each frame, the loop check is initiated starting from a position where the check of a last frame is finished in dual shift ring 701. In addition, when transmission queuing cells are consumed, the allocation in the frame is finished.

20 Finally channel allocating section 602 divides all sub-slots allocated to respective users into two groups, namely, an uplink sub-slot group and a downlink sub-slot group. Then channel allocating section 602 gathers the sub-slots allocated to each user into one as a unit
25 time slot, i.e., a single time slot (variable length slot) for each user.

 In addition, a service priority of a particular

user is changed by changing an alternate frequency between the normal ring and high-rate ring.

A specific example of the channel allocation method described above is next explained further using FIG.8B.

5 FIG.8B is a schematic diagram illustrating a channel allocation result by channel allocating section 602 provided in base station 101 equipped with the wireless communication apparatus according to this embodiment.

10 It is herein assumed that an i_{th} user on uplink and a j_{th} user on downlink are particular users, and that the loop check is initiated from a first user on downlink in normal ring circulation.

Channel allocating section 602 first determines whether or not a first user on downlink is a user for the allocation. The first user on downlink has transmission queuing cells, and therefore channel allocating section 602 determines the first user on downlink to be the user for the allocation. Accordingly channel allocating section 602 allocates a sub-slot
 15 (UC_{D,1}) to the first user on downlink, while decreasing the number of transmission queuing cells in the buffer for this user by 1.

Similarly, channel allocating section 602 allocates a sub-slot (UC_{D,j}) and sub-slot (UC_{D,m}) to the
 25 j_{th} user on downlink and an m^{th} user on downlink, while decreasing the respective numbers of transmission queuing cells in the buffers for these users by 1,

respectively.

Further, channel allocating section 602 checks along dual shift ring 701, and determines an m^{th} user on uplink. The m^{th} user on uplink does not have any
 5 transmission queuing cell, and therefore channel allocating section 602 does not adopt the m^{th} user for the allocation and determines a next user.

Then, channel allocating section 602 determines an i_{th} user on uplink and a first user on uplink to be users
 10 for the allocation, and allocates a sub-slot ($UC_{u,i}$) and sub-slot ($UC_{u,i}$) to these users, while decreasing the respective numbers of transmission queuing cells in the buffers for these users by 1, respectively.

The loop check is next performed while circulating
 15 the high-rate ring (first circulation). That is, channel allocating section 602 determines only the j_{th} user on downlink and i_{th} user on uplink to be users for the allocation, and allocates a sub-slot ($UC_{d,j}$) and sub-slot ($UC_{u,i}$) to these users, while decreasing the
 20 respective numbers of transmission queuing cells in the buffers for these users by 1, respectively.

At this point, since the transmission queuing cells are still present, the loop check is performed along the normal ring (second circulation). Similarly, channel
 25 allocating section 602 allocates a sub-slot ($UC_{d,1}$) and sub-slot ($UC_{d,j}$) to the first user on downlink and j_{th} user on downlink respectively. Then, since a user on uplink

does not have any transmission queuing cell, the loop check is performed along the high-rate ring (second circulation).

At this point, since the particular users, i.e.,
5 the j_{th} user on downlink and i_{th} user on uplink do have any transmission queuing cells, the loop check is performed along the normal ring (third circulation).

In the normal ring (third circulation), channel allocating section 602 allocates a sub-slot ($UC_{D,1}$) to
10 the first user on downlink.

At this point, since any transmission queuing cell is not present in the buffer for each user, channel allocating section 602 finishes the allocation in this frame. In addition, the allocation in this frame is
15 finished at a point of the first user on downlink, and therefore an allocation in a next frame is initiated from this user.

As a result, in the order illustrated at the upper portion in FIG.8A, channel allocating section 602
20 allocates sub-slots. Finally, as illustrated at a lower portion in FIG.8B, channel allocating section 602 divides all the sub-slots allocated to respective users into the uplink sub-slot group and downlink sub-slot group, and in each sub-slot group, gathers the sub-slots
25 allocated to each user into a time slot (variable length slot) for each user. Further, channel allocating section 602 inserts thus gathered downlink time slots

and uplink time slots respectively into downlink user channel 204 and uplink user channel 206 illustrated in FIG.3. Thereby on the user channel, the uplink time slots and downlink time slots are divided with boundary 205 therebetween, and therefore a guard time to be needed is suppressed. As a result, the frame is effectively used.

As described above, channel allocating section 602 allocates the channel fairly without distinguishing between the uplink and downlink corresponding to respective transmission situations of uplink and of downlink. Further, channel allocating section 602 allocates the channel by considering respective QoS requirements of a mobile station and of a base station. The foregoing is the specific channel allocation method in channel allocating section 602.

The operation of base station 101 provided with the wireless communication apparatus with the above configuration is next explained using FIG.5.

First, at the time of reception, a signal transmitted from each mobile station 102 is received at antenna section 401 of base station 101 and is output to RF section 402. RF section 402 performs frequency conversion on the signal received at antenna section 401 to output to modulation/demodulation section 403. Modulation/demodulation section 403 performs demodulation such as $\pi/4$ QPSK scheme on the signal

subjected to the frequency conversion in RF section 402 to output to TDMA section 404.

TDMA section 404 fetches data from the signal demodulated in modulation/demodulation section 403 for
5 each time slot at a predetermined timing, and extracts various information from the fetched data. The thus extracted information is output to either wireless channel control section 406 or IF section 405 corresponding to contents of the information. That is,
10 the extracted information is output to IF section 405 when its contents is indicative of, for example, speech information transmitted on uplink user channel 206, while being output to wireless channel control section 406 when its contents is indicative of various control
15 signals transmitted on access channel 201 and uplink control channel 202 described previously.

IF section 405 transmits the information such as speech output from TDMA section 404 to PSTN (Public Switched Telephone Network) and ISDN (Integrated
20 Services Digital Network).

Wireless channel control section 406 performs an operation corresponding to the contents of the control information output from TDMA section 404. In addition, the operation is described later.

25 Meanwhile, at the time of reception, signals transmitted from PSTN and ISDN are output to TDMA section 404 through IF section 405. Further, various control

signals output from wireless channel control section 406 are provided to TDMA section 404 according to the frame format described previously.

5 TDMA section 404 performs general TDMA processing on the signal output from IF section 405 or wireless channel control section 406 according to the frame contents described previously. In other words, the section 404 adds a control signal such as a unique word to various control signals output from IF section 405
10 or the signal such as a speech signal output from wireless channel control section 406 according to the frame contents described previously to generate data corresponding to a time slot, and then inserts the data into a predetermined slot to output to
15 modulation/demodulation section 403.

Modulation/demodulation section 403 performs modulation such as $\pi/4$ QPSK scheme on the signal output from TDMA section 404 to output to RF section 402. RF section 402 performs frequency conversion on the signal
20 modulated in modulation/demodulation section 403, and the resultant signal is transmitted to each mobile station 102 through antenna section 401.

Further, the operation in wireless channel control section 406 is explained according to the frame contents
25 illustrated in FIG.3.

The operation on access channel 201 is first explained.

Using uplink time slot (A_u), each mobile station 102 transmits a control signal to acquire a control channel to access channel managing section 504. Receiving the signal, access channel managing section 504 outputs a signal for requesting to allocate a control channel to each mobile station 102 to control channel managing section 505. Control channel managing section 505 allocates a control channel to each mobile station 102, and outputs the allocation result to access channel managing section 504.

Using downlink time slot (A_d), access channel managing section 504 transmits to each mobile station 102 the allocation result (in a previous frame) for each mobile station 102 and various control information.

The operations on uplink control channel 202 and downlink control channel 203 are next explained.

Using uplink control channel 202, each mobile station 102 transmits a reporting signal for reporting the contents of a transmission buffer to control channel managing section 505. Receiving the signal, control channel managing section 505 outputs to user channel managing section 506 a signal for requesting to allocate a time slot on each user channel along with the reporting signal.

Specifically, the reporting signal, that is, the uplink transmission situation and QoS requirement situation of the mobile station are stored in uplink

transmission situation buffer 603 illustrated in FIG.7.
Further, the signal for requesting to allocate a time
slot is output to channel allocating section 602
illustrated in FIG.7. At the same time, the downlink
5 transmission situation and QoS requirement situation of
the base station are stored in downlink transmission
situation buffer 601.

Based on the uplink transmission situation, QoS
requirement situation of the mobile station, downlink
10 transmission situation and QoS requirement situation of
the base station, channel allocating section 602
allocates time slots for use by the mobile station on
uplink user channel 206 and downlink user channel 204.
The specific allocation method is as described
15 previously.

When the channel allocation is finished, channel
allocating section 602 outputs the allocation result to
control channel managing section 505.

Using downlink control channel 203, control
20 channel managing section 505, i.e., channel allocating
section 602 transmits the channel allocation result on
each user channel to each mobile station 102.

The operations on downlink user channel 204 and
uplink user channel 206 are finally explained.

25 Using downlink user channel 204, based on the frame
contents, i.e., the allocation result described above,
information such as speech output from IF section 405

is transmitted to each mobile station 102.

Using uplink user channel 206, based on the allocation result on each user channel notified using downlink control channel 203, each mobile station 102
5 transmits information such as speech to base station 101.

The foregoing is the operations of the base station provided with the wireless communication apparatus according to this embodiment.

Thus, according to this embodiment, the number of
10 uplink time slots and the number of downlink time slots on a user channel are determined based on the number of transmission queuing cells (uplink traffic amount) that each mobile station has, the number of transmission queuing cells (downlink traffic amount) that the base
15 station has and QoS that each mobile station and the base station have, and therefore the channel allocation is performed that faithfully and fast responds to uplink and downlink traffic amounts. Accordingly, it is possible to achieve a communication that responds to an
20 asymmetric traffic and QoS of a user without affecting the frame utilization rate and system capacity.

(Second embodiment)

Second embodiment is modified from the first
25 embodiment to assure the QoS of a user to its maximum.

A wireless communication apparatus according to the second embodiment has the same configuration as that

in the first embodiment except a channel allocating section, and detailed explanations are omitted. The channel allocating section in the wireless communication apparatus according to this embodiment is explained
5 below in points different from the channel allocating section in the first embodiment using FIG.9A. In addition, the same sections as those in the first embodiment are not explained.

FIG.9A is a schematic diagram illustrating a
10 channel allocation method for use by the channel allocating section in a base station provided with the wireless communication apparatus according to the second embodiment of the present invention.

First with respect to each of particular users, the
15 channel allocating section sets a threshold Q_{th} 801 for the number of transmission queuing cells, and further sets a flag indicative of a compared result between the number of transmission queuing cells and the threshold Q_{th} 801. Specifically, the channel allocating section
20 sets a flag of "1" for a particular user that has transmission queuing cells of which the number is more than the threshold Q_{th} 801, and a flag of "0" for a particular user that has transmission queuing cells of which the number is less than the threshold Q_{th} 801, among
25 the particular users.

Further when the particular user is present of which the flag indicates "1", the channel allocating

section performs the loop check along the high-rate ring described previously until flag values of the particular users become all "0". The loop check when the flag values of the particular users have become all "0" is
5 the same as that in the first embodiment.

A specific example of the allocation method for use by the above-mentioned allocating section is next explained further using FIG.9B. FIG.9B is a schematic diagram illustrating a channel allocation result by the
10 channel allocating section in a base station provided with the wireless communication apparatus according to this embodiment.

It is herein assumed as in the first embodiment that an i_{th} user on uplink and j_{th} user on downlink are
15 particular users. Further assume that the threshold Q_{th} 801 is "2". In addition, a value of the threshold Q_{th} may be changed as appropriate corresponding to, for example, a communication condition and usage.

First, the channel allocating section examines the
20 numbers of transmission queuing cells of particular users, and sets a flag of the i_{th} user on uplink to "0" and a flag of the j_{th} user on downlink to "1". At this point, since the user is present of which the flag indicates "1", the channel allocating section performs
25 the loop check along the high-rate ring.

That is, the channel allocating section allocates a sub-slot ($UC_{D,j}$) to the j_{th} user on downlink, while

decreasing the number of transmission queuing cells in the buffer for this user by 1. The number of transmission queuing cells of the j_{th} user on downlink becomes thereby less than the threshold Q_{th} 801, and the
5 channel allocating section sets the flag of the user to "0".

Flag values of the particular users thus become all "0", and therefore the channel allocating section finishes the preferential allocation to the particular
10 users described above. Thereafter, the channel allocating section performs the general allocation in the same way as in the first embodiment.

As a result, in the order illustrated in FIG.9B, each user is allocated sub-slots. As illustrated in
15 FIG.9B, it is obvious that sub-slots are preferentially allocated to the j_{th} (particular) user on downlink who has transmission queuing cells of which the number is more than the threshold Q_{th} 801.

Thus according to this embodiment, the channel is
20 preferentially allocated to a particular user by considering the number of transmission queuing cells that the user has, and therefore it is possible to assure a reliable communication to the particular user that needs to perform a real-time and fast communication such
25 as an image. At the same time, it is possible to achieve a communication that responds to an asymmetric traffic and QoS of the user without affecting the frame

utilization rate and system capacity.

(Third embodiment)

The third embodiment is to assure the QoS of a user
5 to its maximum as the second embodiment.

A wireless communication apparatus according to
the third embodiment has the same configuration as that
in the second embodiment except a channel allocating
section, and detailed explanations are omitted. The
10 channel allocating section in the wireless communication
apparatus according to this embodiment is explained
below in points different from the channel allocating
section in the second embodiment using FIG.10A. In
addition, the same sections as those in the second
15 embodiment are not explained.

With respect to each of particular users, the
channel allocating section sets a threshold W_{th} 901 for
a transmission queuing time of transmission queuing cell
and further sets a flag indicative of a compared result
20 between the transmission queuing time of transmission
queuing cell and the threshold W_{th} 901. Specifically,
the channel allocating section sets a flag of "1" for
a particular user that has a transmission queuing time
of transmission queuing cell that is longer than the
25 threshold W_{th} 901, and a flag of "0" for a particular user
that has a transmission queuing time of transmission
queuing cell that is shorter than the threshold W_{th} 901,

among the particular users.

In addition, the transmission queuing time of transmission queuing cell corresponds to a summation, with respect to all transmission queuing cells, of a time from the time information on a transmission queuing cell that a particular user has is stored in uplink transmission situation buffer 603 or downlink transmission situation buffer 601 illustrated in FIG. 7 at the time the channel allocation is initiated to the time the channel allocating section starts the channel allocation. In order to obtain the transmission queuing time of transmission queuing cell described above, the channel allocating section stores transmission queuing times with respect to all transmission queuing cells that a particular user(s) has.

In addition, while this embodiment explains the case that the transmission queuing time of transmission queuing cell is set as described above, the present invention is not limited to the case, and is capable of being carried out in any case modified as appropriate such as a case that the transmission queuing time of transmission queuing cell is a time from the time a particular user transmits information on a transmission queuing cell to the time a base station receives the information.

The foregoing is a different point of the channel allocating section in this embodiment from the channel

allocating section in the second embodiment.

A specific allocation method by the above-mentioned channel allocating section is next explained further using FIG.10B. FIG.10B is a schematic diagram
 5 illustrating a channel allocation result by the channel allocating section in a base station provided with the wireless communication apparatus according to this embodiment. In addition, to simplify the explanation, assume that a transmission queuing time corresponding
 10 to a transmission queuing cell that each user has is all the same.

It is herein assumed as in the second embodiment that an i_{th} user on uplink and j_{th} user on downlink are particular users. Further assume that the threshold W_{th}
 15 901 is a transmission queuing time corresponding to two transmission queuing cells.

First, the channel allocating section examines the transmission queuing times of transmission queuing cell of particular users, and sets a flag of the i_{th} user on
 20 uplink to "0" and a flag of the j_{th} user on downlink to "1". At this point, since the user is present of which the flag indicates "1", the channel allocating section performs the loop check along the high-rate ring.

In other words, the channel allocating section
 25 allocates a sub-slot ($UC_{D,j}$) to the j_{th} user on downlink, while decreasing the number of transmission queuing cells in the buffer for this user by 1. The transmission

queuing time of transmission queuing cell of the j_{th} user on downlink becomes thereby less than the threshold W_{th} 901, and the channel allocating section sets the flag of the user to "0". The operation performed thereafter
5 is the same as in the second embodiment and the explanation thereof is omitted.

As a result, in the order illustrated in FIG.10B, each user is allocated sub-slots. As illustrated in FIG.10B, it is obvious that sub-slots are preferentially
10 allocated to the j_{th} (particular) user on downlink who has the transmission queuing time of transmission queuing cell that is longer than the threshold W_{th} 901.

Thus according to this embodiment, the channel is preferentially allocated to a particular user by
15 considering the transmission queuing time of transmission queuing cell that the user has, and therefore it is possible to assure a reliable communication to the particular user that needs to perform a real-time and fast communication such as an
20 image. At the same time it is possible to achieve a communication that responds to an asymmetric traffic and QoS of the user without affecting the frame utilization rate and system capacity.

25 (Fourth embodiment)

This embodiment allocates, using a CDMA technique, a temporary dedicated access channel to a transmission

reporting signal that reflects a transmission queuing situation of a transmission buffer of each wireless terminal for each frame.

An example of a frame structure of this embodiment is explained using FIG.11. In FIG.11, "1001" denotes a frame, "1002" denotes a multi control channel using the CDMA technique, "1003" denotes a user and user allocation channel using a technique such as TDMA, CDMA or OFDM, "1004" denotes an uplink/downlink dedicated control channel, "1005" denotes an uplink/downlink random access channel (only the time a mobile station is turned on), "1006" denotes an uplink/downlink access and control channel, "1007" denotes a downlink user channel, "1008" denotes an uplink user channel, and "1009" denotes a variable uplink/downlink user channel boundary.

The frame structure of this embodiment contains, as in the conventional TDD system, access channel (Ach) 1005, control channel (Cch) 1004, and user channels 1007 and 1008. Ach and Cch are used to transmit and receive signals using the CDMA system. This embodiment thereby aims to efficiently use channels.

A frame is divided into two parts, i.e., terminal transmission queuing situation reporting signal part 1002 and user information part 1003. The former part is for a transmission queuing situation reporting signal indicative of a transmission queuing situation of a

transmission buffer of each wireless terminal, and the reporting signal is allocated a temporary dedicated multi control channel using a CDMA system to report the transmission queuing situation to a base station without
5 a collision.

The dedicated control channel does not provide interference with other channels when no signal is thereon due to a characteristic of the CDMA with a software-like system capacity. It is thereby possible
10 to use channels effectively.

The allocation of multi control channel 1004 is performed as described next. In the case of a mobile communication, a base station provides a power-on access channel and channel code broadcast channel 1005, and
15 acquires an access channel code of each mobile station in calling, answering and handover.

The base station is provided with a relation table with addresses (or user IDs) of respective mobile stations and multi control channel codes as shown in the
20 following Table 1, and manages the allocation, search and usage situation of the multi control channel. The mobile station uses power-on access channel 1005 only at the time the mobile station is turned on in calling, and transmits a user address or channel ID to the base
25 station using a random access protocol, and the base station obtains a dedicated multi control channel code. In addition, in Table 1, "A" denotes an identification

address of a terminal accessing, "x" denotes non-access, "C" denotes a multi control channel code being used and "Cx" denotes an unused channel code.

[Table 1]

Wireless Terminal Identification Address	Multi Control Channel Code	Usage Situation
A1	C1	1
A2	C2	1
A3	C3	1
.	1
X	Cx1	0
X	Cx2	0
X	Cx3	0
.	0

5

That is, the above table is provided in order for a base station to manage the allocation, usage situation and the like of the control channel. Before performing a communication, each wireless terminal applies a control channel number and acquires a control channel for the terminal, and the base station notifies the terminal of the control channel code being not used currently (usage situation is 0) with the identification address of the terminal. Further, the base station releases the corresponding control channel code when the calling is finished.

The base station notifies the terminal of a code of a vacant channel using the channel code broadcast channel. In answering, the base station notifies the mobile station of a code of a vacant multi control channel

20

directly using channel code broadcast channel 1002. In a handover, a handover-destination base station searches for a vacant multi control channel, and transmits a code of an allocated multi control channel to the base station currently communicating with the mobile station, and the base station notifies the mobile station of the code using the channel code broadcast channel.

Thus according to this embodiment, a wireless terminal transmits a transmission queuing reporting signal to a base station without a collision by using a temporary dedicated control channel, and the base station is thereby capable of instantaneously recognizing a transmission queuing situation of the wireless terminal, and of allocating a user channel corresponding to a transmission/reception amount on each channel and QoS by comprehensively considering a downlink channel reception situation of each user and an uplink transmission queuing situation of each uplink channel. It is thereby possible to eliminate useless channel occupations and collision of a transmission packet and transmission queuing situation reporting signal of the terminal and to perform wireless communications with high efficiency.

(Fifth embodiment)

This embodiment modified from the fourth embodiment is to provide efficient utilization of a

control channel by dividing the control channel into a dedicated control channel and a common control channel.

An example of a frame structure according to this embodiment is explained using FIG.12. In FIG.12, "1101" denotes a frame, "1102" denotes a multi control channel using a CDMA technique, "1103" denotes a user and user allocation channel using a technique such as TDMA, CDMA or OFDM, "1104" denotes an uplink/downlink particular user dedicated control channel, "1105" denotes an uplink/downlink normal user control channel (random access common channel for data and so on), "1106" denotes an uplink/downlink random access channel, "1107" denotes an uplink/downlink access and control channel, "1108" denotes a downlink user channel, "1109" denotes an uplink user channel, and "1110" denotes a variable uplink/downlink user channel boundary.

The frame according to this embodiment is provided with Ach, Cch and Uch. Cch according to this embodiment is divided into moving-picture dedicated control channel (C_{ND}) 1104 and data common control channel (C_{SD}) 1105.

Dedicated control channel 1104 is used in the same way as the control channel described in the embodiment described previously. Common control channel 1105 is used to transmit an uplink control signal using a random access protocol to a user having data or the like that does not require a severe delay characteristic.

Thus according to this embodiment, two kinds of

control channels are provided corresponding to a delay characteristic requirement, and therefore it is possible to assure a quality requirement of a user and to provide an efficient utilization of the control channel.

5 In addition, in the above-mentioned fourth and fifth embodiments, in the case of a mobile communication, the multi control channel is provided with the power-on access channel and channel code broadcast channel, and it is possible to acquire an access channel code of each
10 mobile station in calling, answering and handover. Further, in other cases such as a wireless LAN, the multi control channel is not provided with the power-on access channel and channel code broadcast channel, and a control channel code of each wireless terminal is predetermined.
15 At the time of transmission, the terminal is capable of notifying a base station of a transmission queuing situation of the terminal using a corresponding multi control channel.

 Further in the case of a mobile communication, in
20 calling, a mobile station uses the power-on access channel only at the time the mobile station is turned on, transmits a user address or channel ID to a base station using a random access protocol, and thereby is capable of obtaining a dedicated multi control channel
25 code. Meanwhile in answering, the base station is capable of notifying the mobile station of a code of a vacant multi control channel directly using the channel

code broadcast channel. In a handover, a handover-destination base station searches for a vacant multi control channel, and transmits a code of an allocated multi control channel to a base station currently
5 communicating with the mobile station, and the base station is capable of notifying the mobile station of the code using the channel code broadcast channel.

Further in the above-mentioned fourth and fifth embodiments, it may be possible to adopt communication
10 systems other than the CDMA system if a control channel could be allocated to each terminal, however, it is preferable to adopt the CDMA system in light of efficient channel utilization.

As described above, according to the present
15 invention, it is possible to provide a wireless communication apparatus which faithfully responds to an asymmetric traffic and QoS of a user and which is capable of improving the frame utilization rate and system capacity.

20 Further, by taking advantage of the CDMA having the improved system capacity, each wireless terminal transmits to a base station a queuing reporting signal indicative of a transmission queuing situation of an uplink transmission buffer of the terminal for each frame
25 without a collision by using a temporary dedicated control channel, and the base station is thereby capable of instantaneously recognizing the transmission queuing

situation of the wireless terminal. Further, the base station allocates a user channel corresponding to a transmission/reception amount on each channel and QoS without distinguishing between the uplink and downlink by comprehensively considering a downlink channel reception situation of each user and an uplink transmission queuing situation of each uplink channel. Accordingly it is possible to prevent the utilization of a useless channel and the occurrence of a collision of a transmission packet and another signal such as transmission request signal of the terminal and to provide a wireless communication apparatus with high efficiency.

This application is based on the Japanese Patent Applications No.HEI11-178737 filed on June 24, 1999 and No.HEI10-356409 filed on December 15, 1998, entire contents of which are expressly incorporated by reference herein.

20

Industrial Applicability

The present invention is preferable to be used in a field of wireless communication using ATM.

CLAIMS

1. A wireless communication apparatus comprising:
monitoring means for monitoring for each unit frame
a situation of transmission queuing cell in each of
uplink storing means and downlink storing means for each
of a plurality of communication users; and
allocating means for allocating a unit sub-slot to
each transmission queuing cell for each unit frame based
on an entire situation of the storing means.
2. The wireless communication apparatus according to
claim 1, wherein the allocating means allocates unit
sub-slots of which the number is in a range that the unit
frame is capable of storing, according to a constant
regulation.
3. The wireless communication apparatus according to
claim 2, wherein the constant regulation includes a
regulation such that the unit sub-slot is fairly
allocated to each transmission queuing cell stored in
each storing means and the transmission queuing cell
allocated the unit sub-slot is deleted from the storing
means.
4. The wireless communication apparatus according to
claim 3, wherein the constant regulation includes a
regulation such that a first circulation is repeated such
that at an allocation occasion for each of the uplink
storing means and the downlink storing means for each
communication user, the unit sub-slot is allocated to

a transmission queuing cell with a longest transmission queuing time stored in each storing means.

5. The wireless communication apparatus according to claim 4, wherein the constant regulation includes a regulation such that the unit sub-slot is preferentially allocated to a particular transmission queuing cell stored in each storing means.

6. The wireless communication apparatus according to claim 5, wherein the constant regulation includes a regulation that provides between each first circulation a second circulation such that at an allocation occasion for each of the uplink storing means and the downlink storing means of each communication user, the unit sub-slot is allocated only to the particular transmission queuing cell that has the longest transmission queuing time stored in each storing means.

7. The wireless communication apparatus according to claim 6, further comprising:

arranging means for dividing all unit sub-slots allocated to transmission queuing cells for uplink and downlink respectively into an uplink sub-slot group and a downlink sub-slot group, gathering unit sub-slots allocated to each communication user at each of the uplink sub-slot group and the downlink sub-slot group into a channel, and arranging the channel on each of an uplink user channel and a downlink user channel in the unit frame.

8. The wireless communication apparatus according to claim 7, wherein the allocating means comprises comparing means for performing a comparison between the total number of stored particular transmission queuing
5 cells and a threshold for each storing means, and performs an allocation corresponding to a result of the comparison.

9. The wireless communication apparatus according to claim 7, wherein the allocating means comprises
10 comparing means for performing a comparison between a transmission queuing time of a stored particular transmission queuing cell and a threshold for each storing means, and performs an allocation corresponding to a result of the comparison.

15 10. The wireless communication apparatus according to claim 8, wherein the comparing means performs the comparison only to storing means for storing a particular transmission queuing cell.

11. The wireless communication apparatus according to
20 claim 9, wherein the comparing means performs the comparison only to storing means for storing a particular transmission queuing cell.

12. The wireless communication apparatus according to claim 10, wherein the comparing means sets the threshold
25 corresponding to a quality requirement of the particular transmission queuing cell.

13. The wireless communication apparatus according to

claim 11, wherein the comparing means sets the threshold corresponding to a quality requirement of the particular transmission queuing cell.

14. The wireless communication apparatus according to
5 claim 1, wherein the frame is divided into a terminal transmission queuing situation reporting signal part and a user information part, and a dedicated control channel is allocated to a transmission queuing situation reporting signal of each wireless terminal.

10 15. The wireless communication apparatus according to claim 14, wherein a second control channel is provided besides the dedicated control channel, and both control channels are used corresponding to a delay characteristic requirement of each wireless terminal.

15 16. A base station provided with a wireless communication apparatus, said wireless communication apparatus comprising:

monitoring means for monitoring for each unit frame
a situation of transmission queuing cell in each of
20 uplink storing means and downlink storing means for each of a plurality of communication users; and

allocating means for allocating a unit sub-slot to
each transmission queuing cell for each unit frame based
on an entire situation of the storing means.

25 17. A communication terminal apparatus performing wireless communications with a base station apparatus provided with a wireless communication apparatus, said

wireless communication apparatus comprising:

monitoring means for monitoring for each unit frame
a situation of transmission queuing cell in each of
uplink storing means and downlink storing means for each
5 of a plurality of communication users; and

allocating means for allocating a unit sub-slot to
each transmission queuing cell for each unit frame based
on an entire situation of the storing means.

18. The communication terminal apparatus according to
10 claim 17, wherein the communication terminal apparatus
reports a situation of transmission queuing cell to the
base station.

19. A wireless communication method, comprising:

monitoring for each unit frame a situation of
15 transmission queuing cell in each of uplink storing means
and downlink storing means for each of a plurality of
communication users reported from respective one of the
plurality of communication users; and

allocating a unit sub-slot to each transmission
20 queuing cell for each unit frame based on an entire
situation of the storing means.

20. The wireless communication method according to
claim 19, further comprising:

performing a comparison between the total number
25 of stored particular transmission queuing cells and a
threshold for each storing means; and

performing an allocation corresponding to a result

of the comparison.

21. The wireless communication apparatus according to claim 19, further comprising:

performing a comparison between a transmission
5 queuing time of a stored particular transmission queuing cell and a threshold for each storing means; and

performing an allocation corresponding to a result of the comparison.

22. The wireless communication method according to
10 claim 20, further comprising:

dividing all unit sub-slots allocated to
transmission queuing cells for uplink and downlink
respectively into an uplink sub-slot group and a downlink
sub-slot group;

15 gathering unit sub-slots allocated to each
communication user at each of the uplink sub-slot group
and the downlink sub-slot group to construct a channel;

arranging the channel on each of an uplink user
channel and a downlink user channel in the unit frame;

20 and

notifying said each communication user of a result
of arrangement.

23. The wireless communication method according to
claim 21, further comprising:

25 dividing all unit sub-slots allocated to
transmission queuing cells for uplink and downlink
respectively into an uplink sub-slot group and a downlink

sub-slot group;

gathering unit sub-slots allocated to each communication user at each of the uplink sub-slot group and the downlink sub-slot group to construct a channel;

5 arranging the channel on each of an uplink user channel and a downlink user channel in the unit frame; and

notifying said each communication user of a result of arrangement.

ABSTRACT

Downlink transmission situation buffer 601 stores information on downlink transmission queuing cell for each communication terminal. Uplink transmission situation buffer 603 stores information on uplink transmission queuing cell for each communication terminal. Based on the information stored in uplink transmission situation buffer 603 and the information stored in downlink transmission situation buffer 601, channel allocating section 602 allocates a unit sub-slot fairly to each transmission queuing cell.

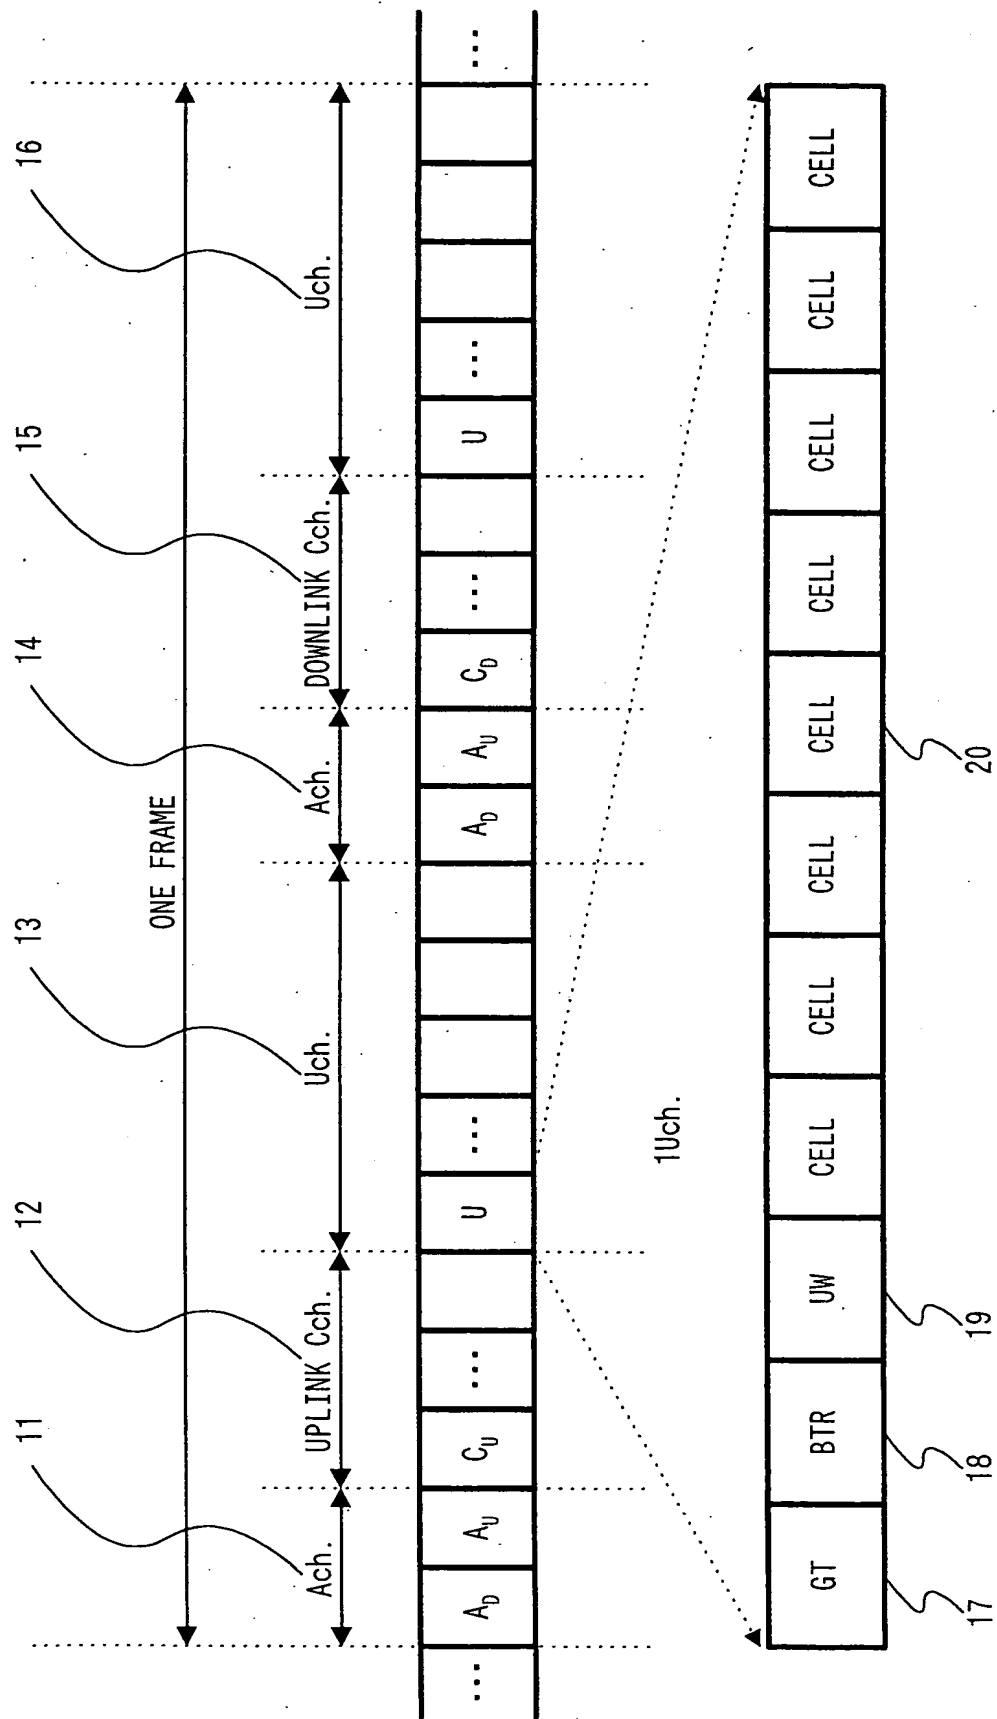


FIG. 1

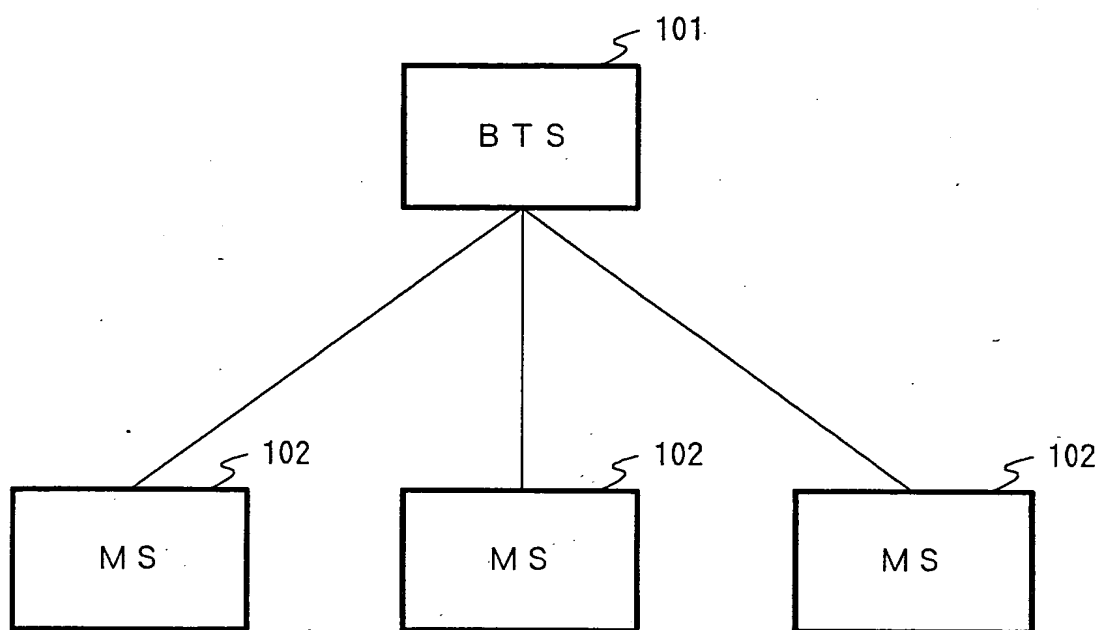


FIG. 2

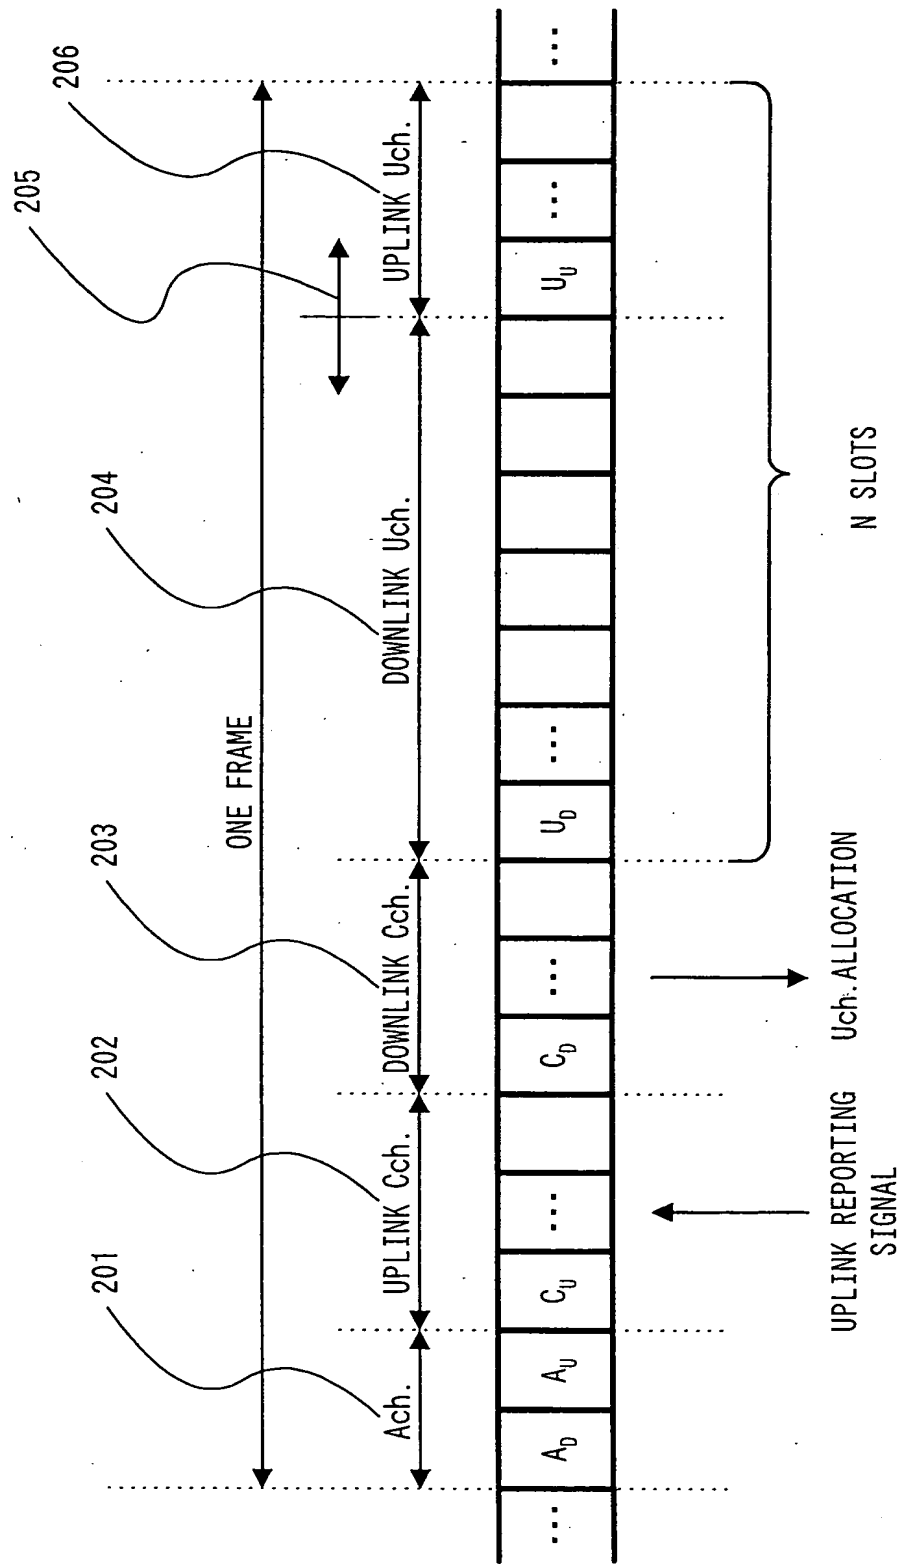


FIG. 3

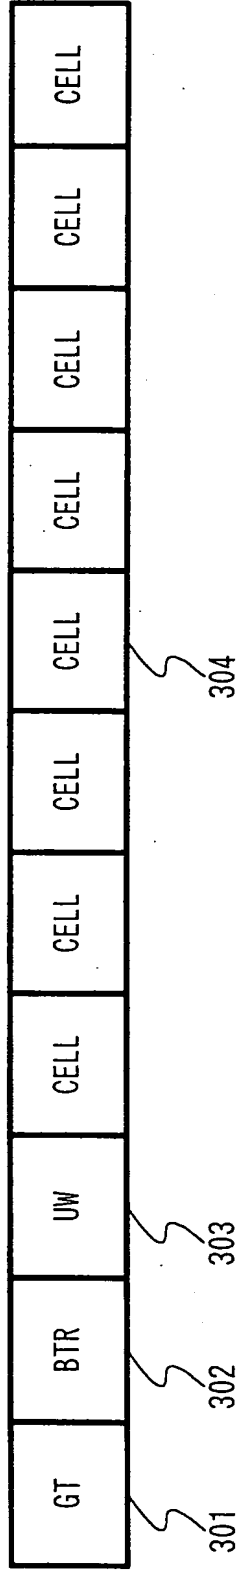


FIG. 4

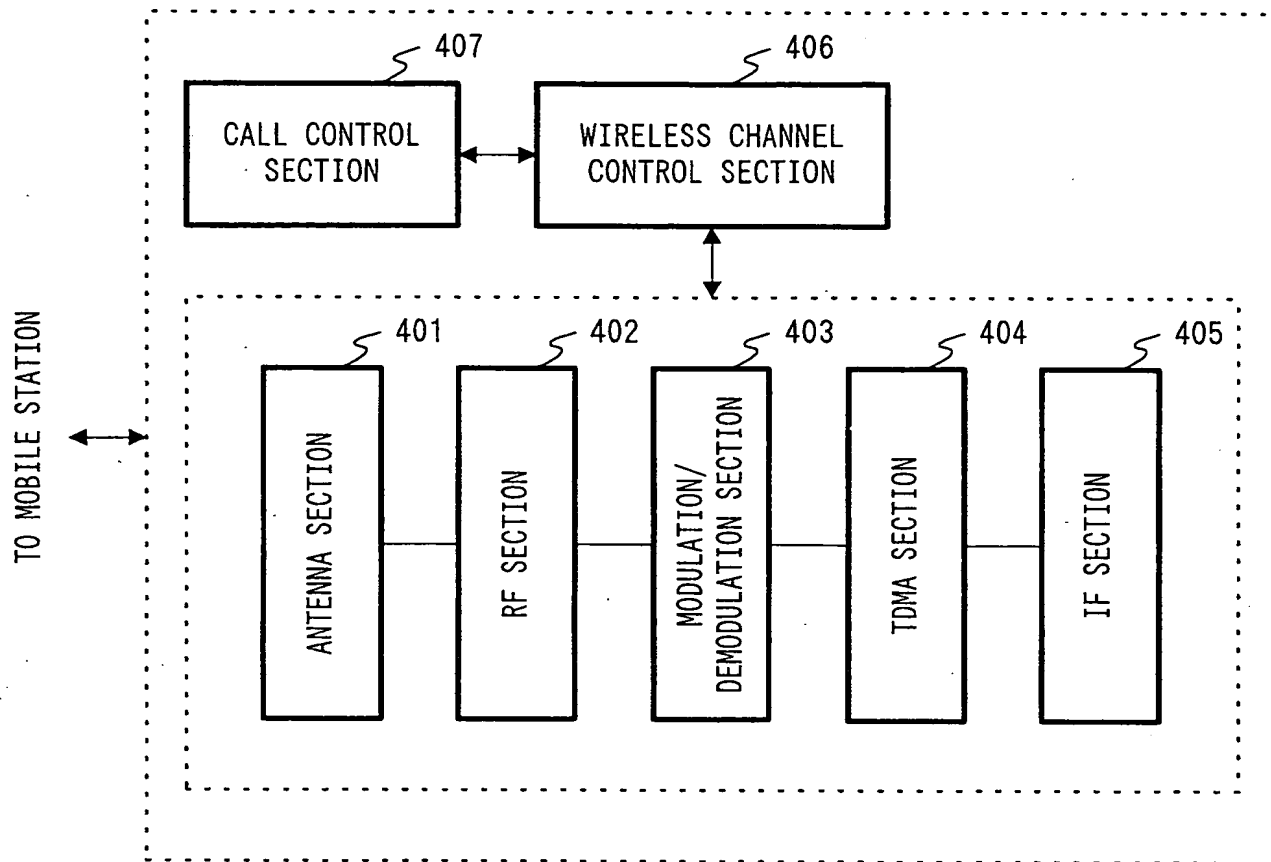


FIG. 5

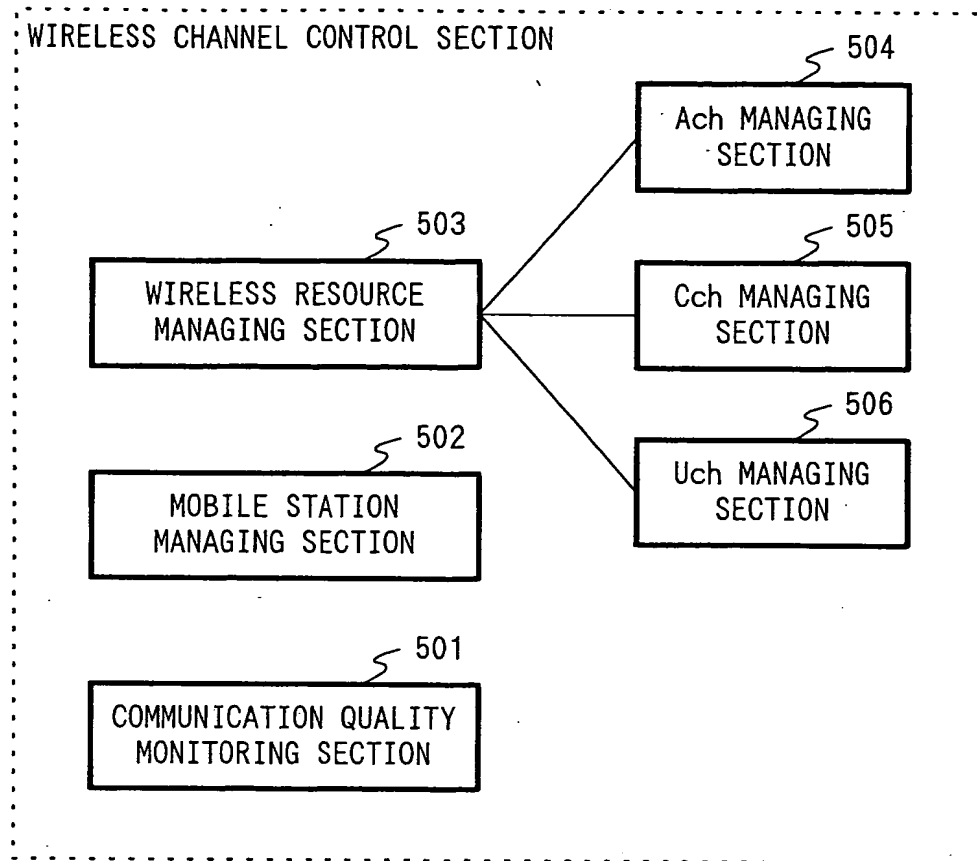


FIG. 6

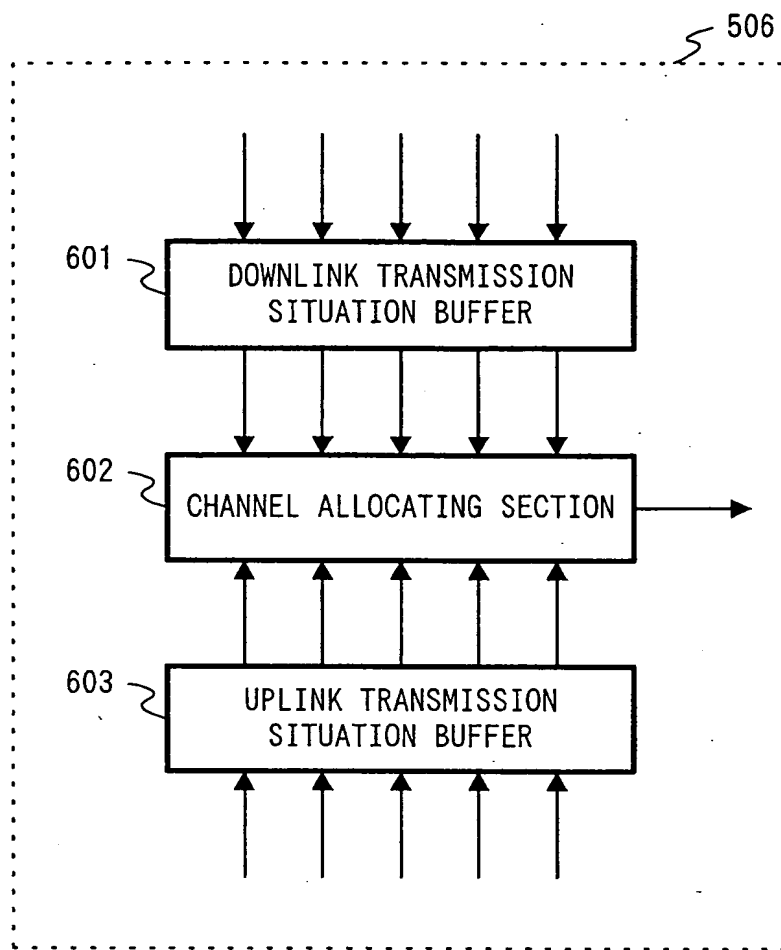


FIG. 7

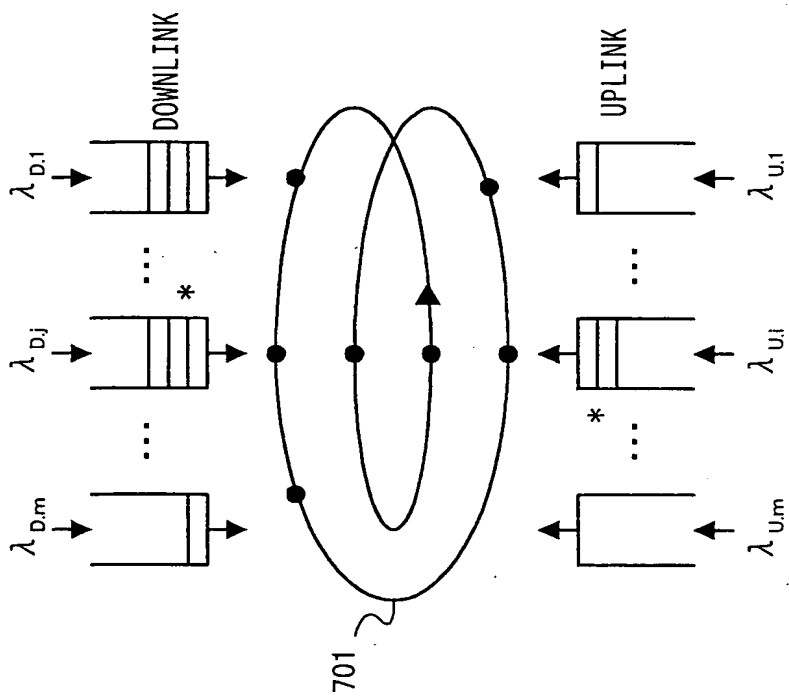


FIG. 8A

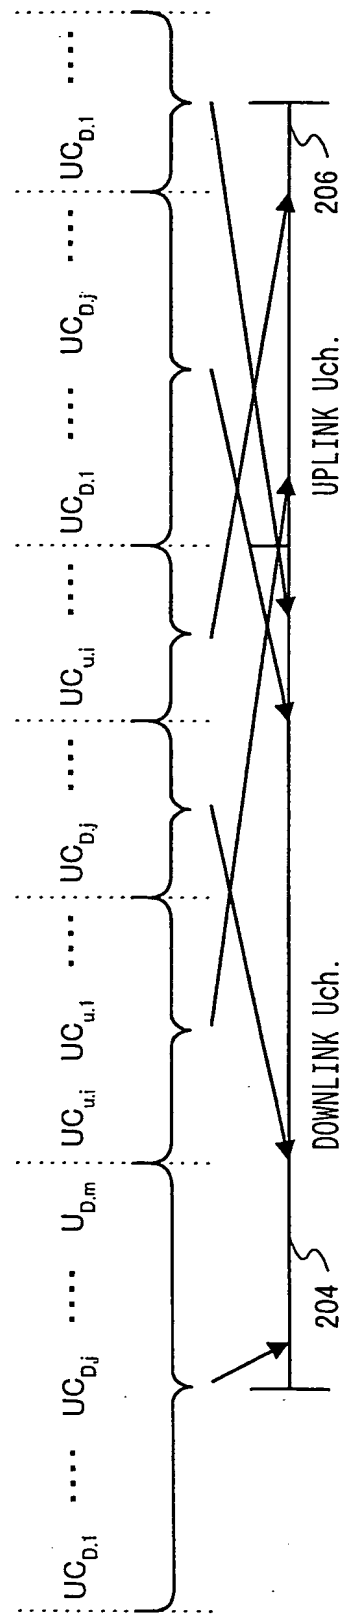


FIG. 8B

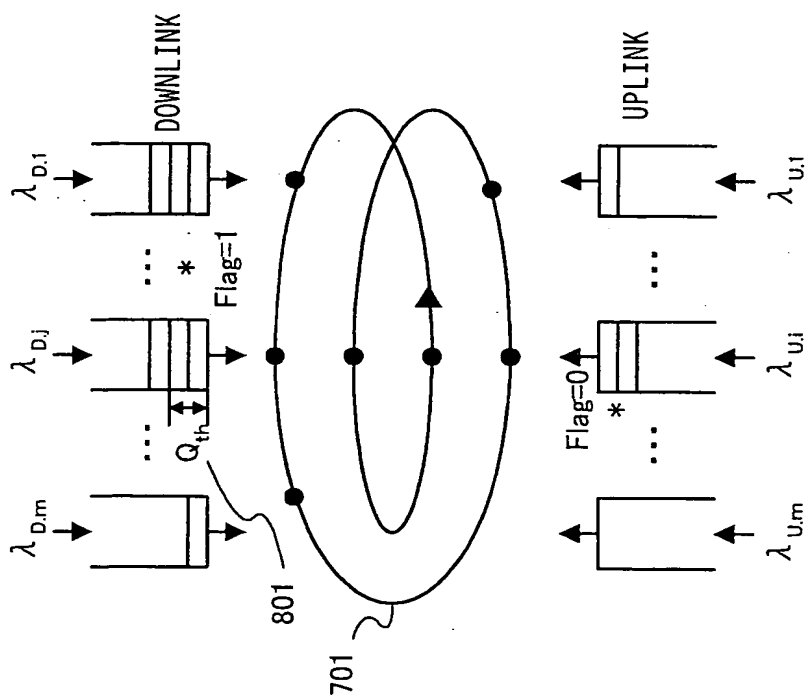


FIG. 9A

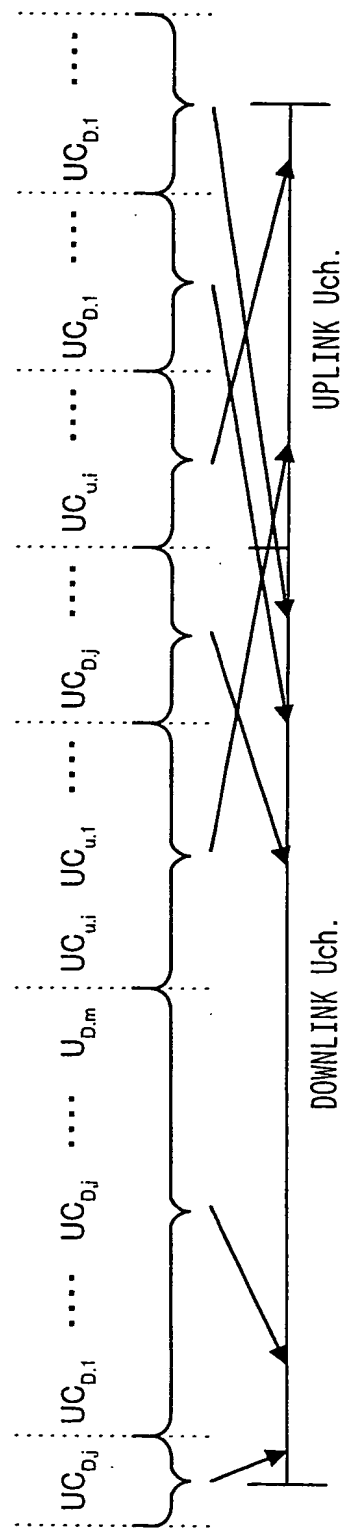


FIG. 9B

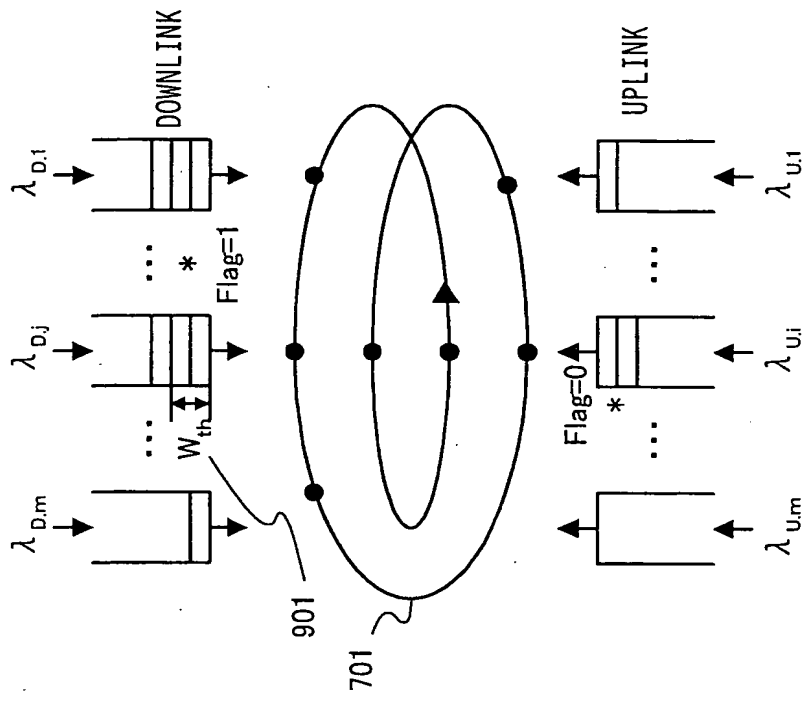


FIG. 10A

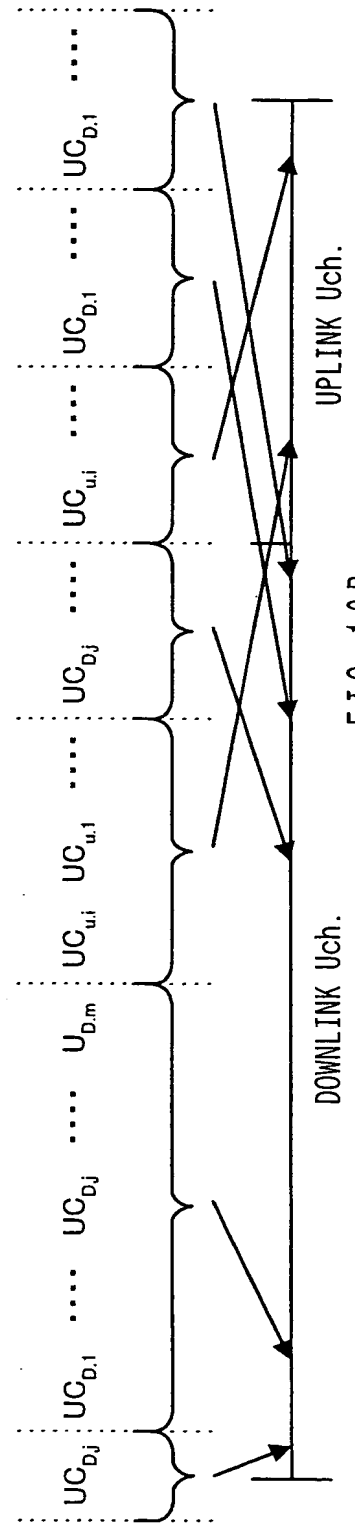


FIG. 10B

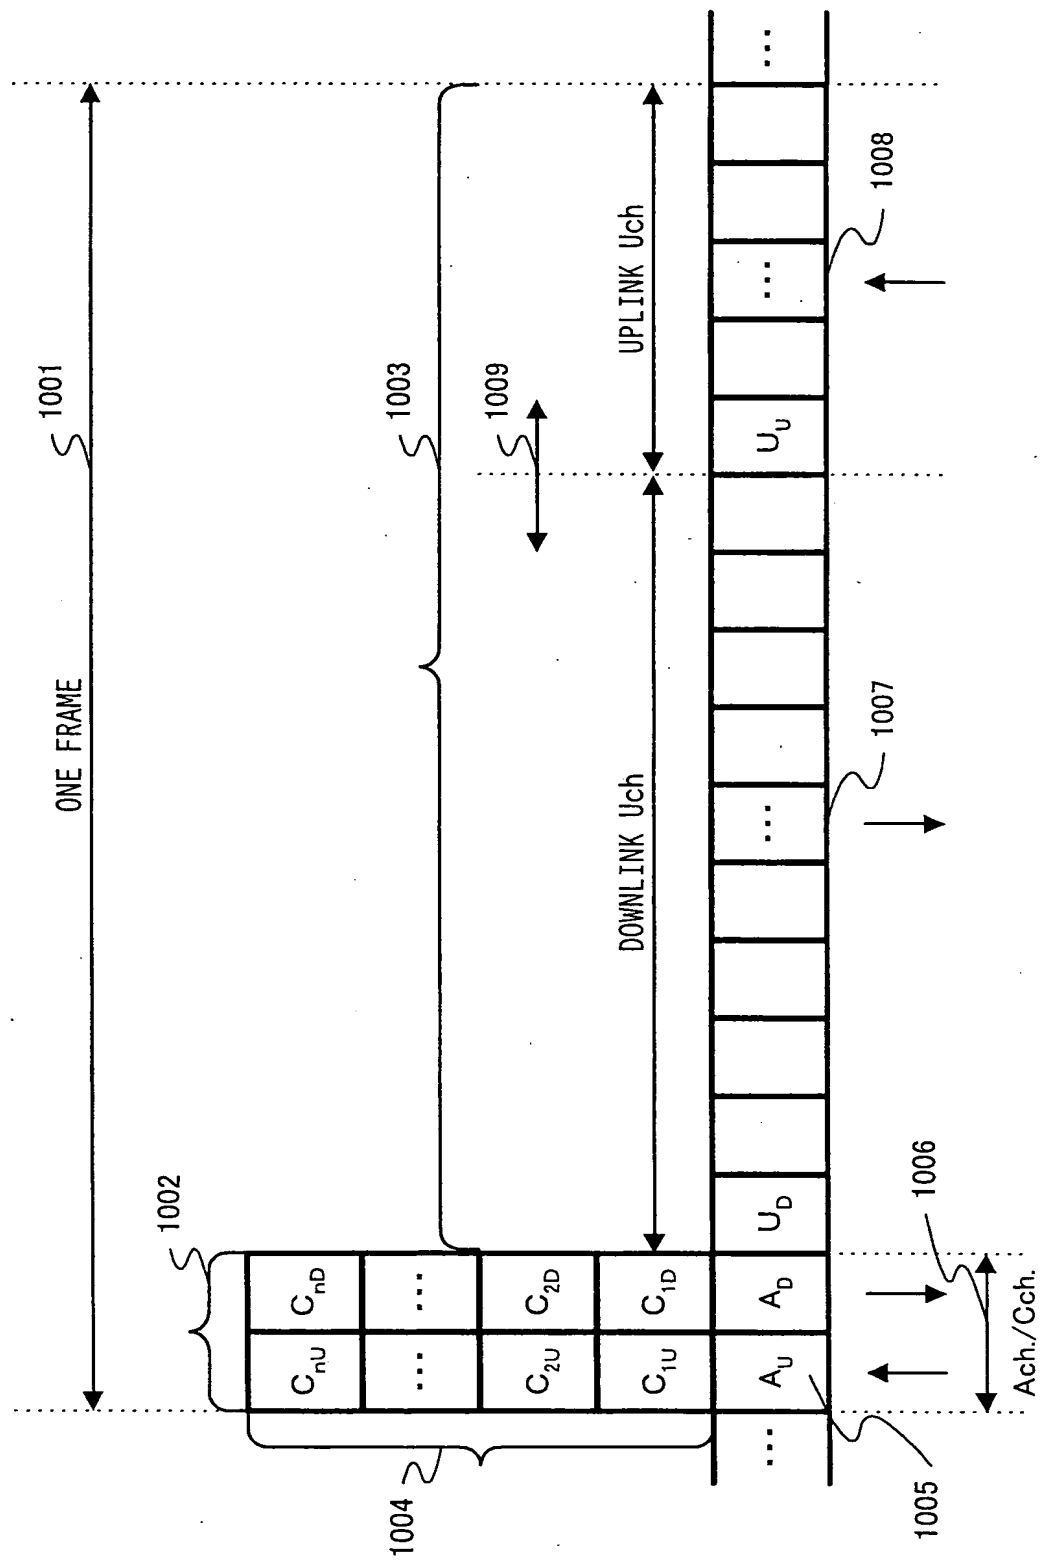


FIG.11


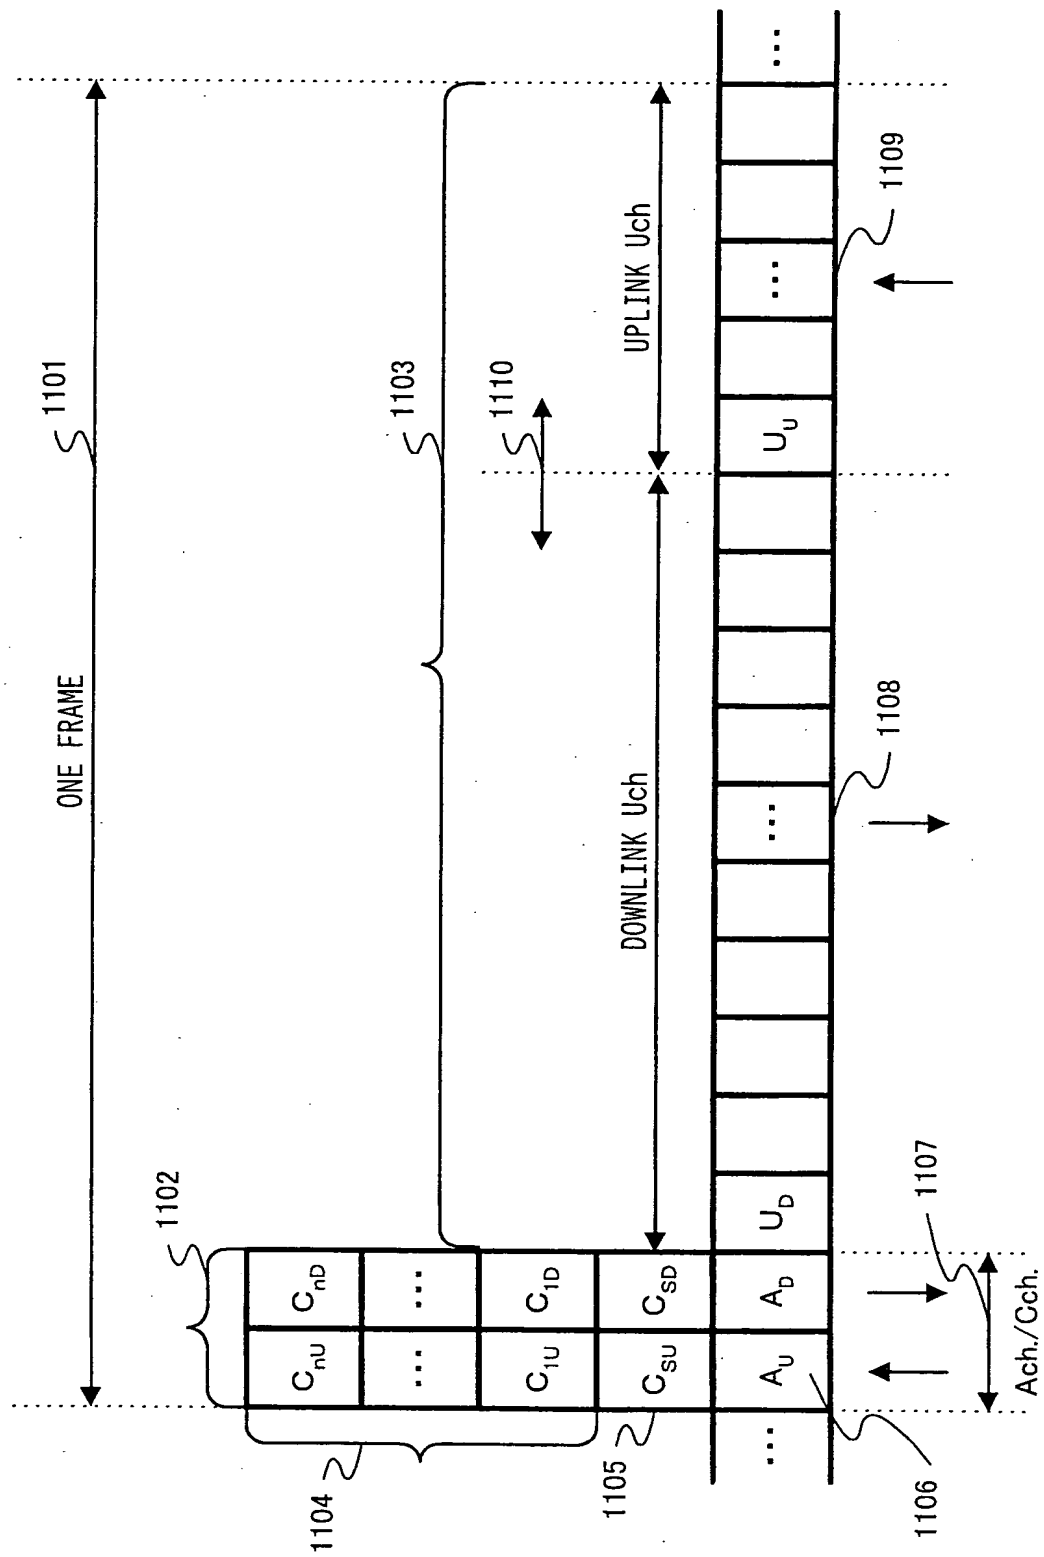


FIG.12



転居先不明で
配達できません

昭島

1 2

吉沢

東京都昭島市緑町4-4-18
グリーンヒルあきしま104号
石 貴増 様



西2
産
記
録

National/Panasonic

松下通信工業株式会社

- | | | | |
|---|-----------|------------------|----------------------|
| <input type="checkbox"/> 本社事務所 | 〒105-8586 | 東京都港区芝大門一丁目1番30号 | ナショナル6号館 |
| <input type="checkbox"/> 網島地区 | 〒223-8639 | 横浜市港北区綱島東四丁目3番1号 | 電話 (045)531-1231(代表) |
| <input type="checkbox"/> 佐江戸地区 | 〒224-8539 | 横浜市都筑区佐江戸町600番地 | 電話 (045)932-1231(代表) |
| <input checked="" type="checkbox"/> YRP地区 | 〒239-0847 | 神奈川県横須賀市光の丘5-3 | 電話 (0468)47-1231(代表) |
| <input type="checkbox"/> 松本地区 | 〒399-8730 | 長野県松本市大字笹賀5652番地 | 電話 (0263)26-1231(代表) |
| <input type="checkbox"/> 白河地区 | 〒961-0835 | 福島県白河市白坂字牛清水15番地 | 電話 (0248)28-2231(代表) |
| <input type="checkbox"/> 花巻地区 | 〒025-0303 | 岩手県花巻市大畑第九地割92番4 | 電話 (0198)26-2231(代表) |
| <input type="checkbox"/> 静岡地区 | 〒436-0082 | 静岡県掛川市淡陽18番地 | 電話 (0537)23-1121(代表) |

担当事業部 部課名

技術管理課



(English Annotation)

RECORD OF DELIVERY

Recipient: Mr. Guizeng Shi
Greenhill Akishima 104, 4-4-18, Midori-cho, Akishima-shi,
Tokyo

This mail could not be delivered since a forwarding address of recipient is
uncertain. From: Akisima Post Office

Sender: Matsushita Communication Industrial Co., Ltd.

[Delivery Record No. 534-06-94282-0]

(NOTICE OF DELIVERY)

Sample

Exhibit DD

郵便物お預りのお知らせ



33-3302

お知らせ番号

〒208-8799 多摩郵便局 配達担当者

郵便課 374-6432 (8:00~21:00)
郵便課 374-6422

配達日 月 日 時 分 頃 様

からの郵便物を配達に伺いましたが、ご不在でした。再度配達いたしますので、ご希望の日を電話又はこの葉書でご連絡ください。
保管期限は 月 日までです。
なお、このほか、この葉書裏面のいずれかの方法もございますので、ご都合のよいものをご連絡ください。
※お申出いただければ保管期間を3日間延長いたします。
※税付は1ヶ月間保管いたします。

保管郵便物の種類

郵便物の種類	普通	速達	郵便物の種類	普通	速達	郵便物の種類	普通	速達
現金書留	1	31	国際(書留)	32	39	現金不足郵便	17	27
一般書留	2	32	国際(通常)	40	40	簡易書留	18	48
簡易書留	3	33	国際(小包)	41	41	簡易書留	19	49
配達証明	4	34	冊子・小包	42	42	税付	20	50
特別送達	5	35	普通 生もの	43	43	小包	21	51
電信書留	6	36	小包 その他	44	44	郵便記録	22	52
E.M.S.	7	37	書留小包	45	45	郵便記録	23	53
国際郵便物	8	38	料金書	46	46	郵便記録	24	54
保冷郵便物	23	54						

郵便局へお受取りに来られる場合

◎郵便局の窓口交付時間 祝日の前日は土曜日と同じ扱いです。

区 別	平 日	土 曜 日	日 曜 日・祝 日
多 摩 郵 便 局	24時間	0時~20時	7時~24時
(7月および12月)		0時~21時	
配達をしない郵便局	9時~17時	取り扱いません	

(注) 当日の窓口でのお受け取りはできません。
※代理人(同居家族を除く)の場合は委任状が必要です。

ご来局の際は必ずご持参ください

この通知書

と

(証明書)
健康保険証
運転免許証
など

と

印 章

です。

(English Annotation)

NOTICE OF DELIVERY

To: Recipient's Address & Name

From: Custodial Post Office's Name

Tel No. (From 8:00 to 21:00)

* Reference No. * 33-3302

First Delivery Date & Time: _____

Second Delivery Date & Time: _____

You were absent at the time of delivery of mail from Sender's Name _____ on the above date & time. Please inform us of your convenient re-delivery date by telephone or by post card of the reverse side of this notice.

The custodial period will expire on _____.

* Upon request, three days are extendible.

Kind of Custodial Mail: _____

In case you would come to Post Office to pick up the mail, please bring this notice without fail together with any identification card and seal. Followings are details of our working time.
